

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner was established by Frank W. Campbell in 1884 under GLO Contract number 498, dated May 10, 1884. Surveyor General Record States;

" Set basalt stone 15x10x8in. 10 inc. in the ground for 1/4 sec corner marked 1/4 on N. face. from which


A Spruce 8 inc diameter bears S 6 W 26 lks dist marked 1/4 SBT.

A Spruce 12 inc diam bears N 7 W 27 lks dist marked 1/4 SBT.

No record of subsequent remonumentation found in county records.

Description of corner evidence found:

None.

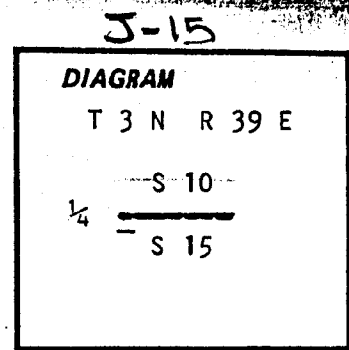

See map of survey: number 17-83 union County surveyor records.

UNION COUNTY SURVEYOR

Date Received 5-23-83

Date Filed 5-26-83

By G. LANGLITZ


File No. 304-83 R

Description of monument and accessories | established to perpetuate the original location of this corner:

At single proportionate distance I set a 2 1/2 x 30 inch aluminum pipe with aluminum cap marked as shown 28 inches in the ground, from which;

A Douglas Fir 10 inches in diameter bears N 14 E, 11.4 feet, marked 1/4 S 10 BT, with a brass washer marked Opls 991 in the BT blaze.

A Douglas Fir 12 inches diameter bears S 23 E , 6.2 feet, marked 1/4 S 15 BT, with a brass washer marked opls 991 in the BT Blaze.

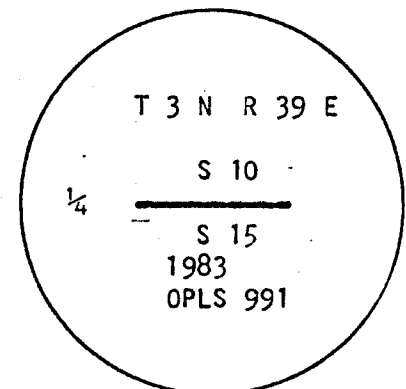

I used a steel tape and magnetic compass with 18 degree East declination set in the compass. Distance measured to the center of the tree.

Witness; Duane I. Griffith, Rick Robinson. Corner set May 17, 1983

REGISTERED PROFESSIONAL LAND SURVEYOR

Office of..... County of.....
 State of....., I hereby certify that the within instrument was filed in this office
 for record on the..... day of....., 19.....

..... by
 (COUNTY OFFICIAL) (DEPUTY)

OREGON
 JULY 13, 1973
GREGORY T. BLACKMAN
 991