


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

J-16

History of original corner establishment:

Corner not originally set in original survey.



No record of subsequent monumentation found in county records.

Description of corner evidence found:

UNION COUNTY SURVEYOR

Date Received 5-23-83
Date Filed 5-26-83
By G. LANGLITZ, DEPUTY
File No. 305-83R


See map of survey number 17-83 Union County surveyor records.

Description of monument and accessories established to perpetuate the original location of this corner:

At the proportionate distance I set a 2½ x 30 inch Aluminum pipe with the aluminum cap marked as shown, 27 inches in the ground in mound of stone, from which;

A 43 inch Douglas Fir bears S 7 W, 102.5 feet, marked E 1/16, S15 BT, with a brass washer marked opls 991 set in the BT blaze.

No other tree within limits.

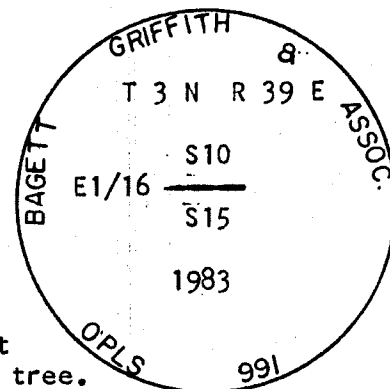

I used a steel tape and magnetic compass with 18 degree East declination set in . Distance measured to the center of the tree.

Witness present : Norman Paullus
Greg Blackman

Corner set May 17, 1983

REGISTERED PROFESSIONAL LAND SURVEYOR

Gregory T. Blackman

OREGON
JULY 13, 1973
GREGORY T. BLACKMAN
991

Office of..... County of.....
State of....., I hereby certify that the within instrument was filed in this office
for record on the..... day of....., 19.....
..... by

(COUNTY OFFICIAL)

(DEPUTY)