


History of original corner establishment:

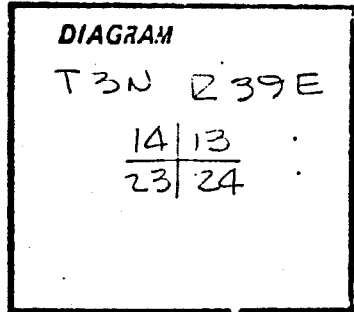

Corner was established by Frank W. Campbell, Contract No. 498. Commenced May, 1884, and completed May, 1884.

80.00 set a pine post 4 feet long, 4 inches square 24 inches in ground. From which:

- A pine 11 inches diameter bears N 39⁰ E 55 lks. dist.
- A pine 30 inches diameter bears S 20⁰ E 102 lks. dist.
- A pine 36 inches diameter bears S 38⁰ W 75 lks. dist.
- A pine 30 inches diameter bears N 30⁰ W 47 lks. dist.

No record of subsequent remonumentation found in County Records.

Description of corner evidence found:

No evidence Found.

Description of monument and accessories established to perpetuate the original location of this corner:

UNION COUNTY SURVEYOR

Date Received _____

Date Filed _____

By _____


File No. 164-83R

UNION COUNTY SURVEYOR
CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

Corner originally established by Frank W. Campbell under GLO contract number 498, dated May 15, 1884. GLO record states: Set post for Cor to Secs 13, 14, 23 and 24, from which:

- A Pine 11 in diam bears N 39° E, 55 Lks dist
- A Pine 30 in diam bears S 20° E, 102 Lks dist
- A Pine 36 in diam bears S 38° W, 75 Lks dist
- A Pine 30 in diam bears N 30° W, 47 Lks dist



GLO Notes also call a creek 10.00 chains East of corner position.

No record of subsequent monumentation found in UNION COUNTY survey records.

DESCRIPTION OF CORNER EVIDENCE FOUND:

Found no evidence of the original corner or its' accessories. I place the position of the corner at the intersection of an existing North-South fence line at proportionate distance North and South. The existing fence fits the creek call to the East. I therefore accept it's position to control the East-West position of the corner.

SEE SURVEY NUMBER 017-2005

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At position determined by survey, I set a 2 1/2" x 30" aluminum pipe with a 2 1/2" aluminum cap marked as shown, 29 inches in the ground, from which:

NEW BEARING OBJECTS:

- A 5/8"x30" iron pin with 2" aluminum cap marked "BGB SURVEY MARKER NE RP" bears N 63° E, a distance of 19.63 feet.
- A 5/8"x30" iron pin with 2" aluminum cap marked "BGB SURVEY MARKER SE RP" bears S 49° E, a distance of 26.12 feet.
- A 5/8"x30" iron pin with 2" aluminum cap marked "BGB SURVEY MARKER SW RP" bears S 49° W, a distance of 21.24 feet.
- A 5/8"x30" iron pin with 2" aluminum cap marked "BGB SURVEY MARKER NW RP" bears N 54° W, a distance of 19.69 feet.


Set a steel fence post approximately 1 ft. North of the corner monument

I hereby certify that the corner was monumented on August 30, 2005.

Witness: Greg Blackman, Jr., Mark Brooks, Rick Thew



Renewal Date: December 31, 2006

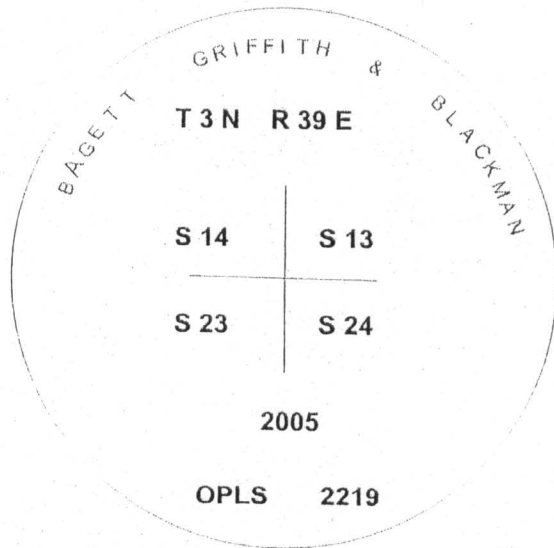

UNION COUNTY SURVEYOR

Date Received 9/15/05

Date Filed 9/15/05

Filed By [Signature]

File Number 021-2005R

I used a steel tape and magnetic compass in the establishment of the new accessories. I used 18° East declination, the distances are to the center of the aluminum caps.

HORIZONTAL CONTROL DATA

UNION COUNTY, OREGON

OREGON STATE PLANE, NORTH ZONE (3601)

STA NAME: 200539

SECTION CORNER COMMON TO SECTIONS 13, 14, 23 and 24

TWP. 3 N. RGE. 39 E.

GEODETIC COORD: NAD 83(91)

DATE TIED: September 15, 2005

LAT: 45 ° 43 ' 57.99189 " N

SURVEYOR: RICK G. ROBINSON
OPLS 2219

LONG: 117 ° 53 ' 27.73040 " W

FIRM: BAGETT, GRIFFITH, & BLACKMAN
2006 Adams Avenue
La Grande, OR 97850
(541) 963-6092

SP. COOR: NAD 83(91)

N: 764016.862 INT FT.

E: 8868184.945 INT FT.

TYPE: GPS

THETA: 1 ° 51 ' 0.86627079 "

ORDER: SECOND CLASS: 1


SCALE FACTOR: 0.9999430377

ELEV: 2988.45 US FT.

ELEV: DATUM: NGVD 29

COMMENTS:

2 1/2" aluminum monument marked:

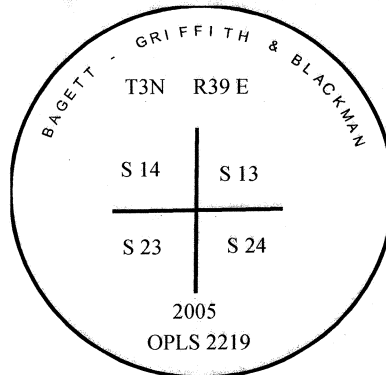

REGISTERED
PROFESSIONAL
LAND SURVEYOR

OREGON
July 17, 1986
RICK G. ROBINSON
2219

Renewal Date: December 31, 2006

1 METER = 3.2808333333... US FEET = 39.37 INCHES

1 METER = 3.280839895 INT'L FEET OR 1 INCH = 2.54 CM

TO CALCULATE ELEVATION FACTOR (IN THE NORTH AMERICAN CONTINENT)

DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)