

UNION COUNTY SURVEYOR
CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

Corner not previously originally established.

T 3 N R 39 E Q-22



No record of subsequent monumentation found in UNION COUNTY survey records.

DESCRIPTION OF CORNER EVIDENCE FOUND:

NONE

SEE SURVEY NUMBER 017-2005

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED

TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At position determined by survey, I set a 5/8"x30" iron pin with a 2 1/2" aluminum cap marked as shown, 29 inches in the ground, from which:

NEW BEARING TREES:

A 7" diameter Ponderosa Pine bears S 2° W, a distance of 6.15 feet, marked X BT.

A 7" diameter Ponderosa Pine bears N 40° W, a distance of 5.00 feet, marked SW1/16 S24 BT.


I hereby certify that the corner was monumented on September 6, 2005.

Witness: Greg Blackman, Jr., Mark Brooks, Rick Thew

REGISTERED
PROFESSIONAL
LAND SURVEYOR

OREGON
July 17, 1986
RICK G. ROBINSON
2219

Renewal Date: December 31, 2006

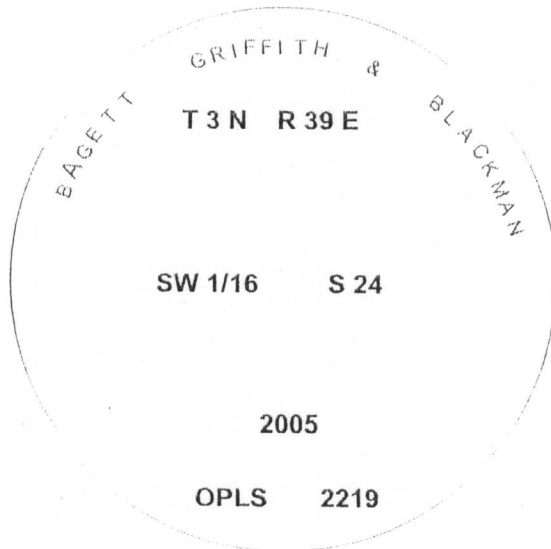

**UNION COUNTY
SURVEYOR**

Date Received 9/05/05

Date Filed 9/15/05

Filed By [Signature]

File Number 031-2005R

I used a steel tape and magnetic compass in the establishment of the bearing tree. I used 18° East declination, the distances are to a 60d spike driven into the right side of the root crown of the new bearing trees. A brass washer marked OPLS 2219 is attached to the BT blaze of the new bearing trees.