


History of original corner establishment:

Corner was established by Frank W. Campbell, Contract No. 498. Commenced May, 1884, and completed May, 1884.

80.00 set pine post 4 feet long, 4 inches square 24 inches in ground. From which:

- A pine 10 inches diameter bears S 10° E 138 lks. dist.
- A pine 8 inches diameter bears N 61° W 92 lks. dist.
- A pine 20 inches diameter bears N 62° E 82 lks. dist.
- A pine (Not legible my copy) 170 lks. dist.

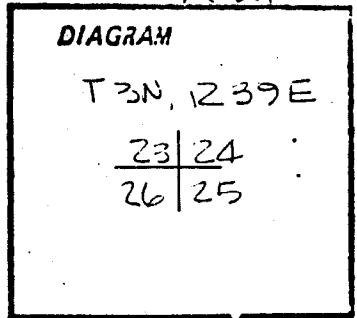

No record of subsequent remonumentation found in County Records.

Description of corner evidence found:

Found fence corner at location.
No other evidence found.

Description of monument and accessories established to perpetuate the original location of this corner:

**UNION COUNTY
SURVEYOR**

Date Received _____

Date Filed _____

By _____


File No. 170-83R

**UNION COUNTY SURVEYOR
CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

Corner originally established by Frank W. Campbell under GLO contract number 498, dated May 15, 1884. GLO record states: Set post for Cor to Secs 23, 24, 25 and 26, from which:
 A Pine 20 in diam bears N 62° E, 82 Lks dist
 A Pine 13 in diam bears S 46° W, 170 Lks dist
 A Pine 10 in diam bears S 80° E, 138 Lks dist
 A Pine 8 in diam bears N 60° W, 92 Lks dist
 Road survey and deeds acquiring right of way (Deed Volume 111, pages 246 through 254 of the deed records of Union County) make reference to the corner position.

T 3 N R 39 E R-21



No record of subsequent monumentation found in UNION COUNTY survey records.

DESCRIPTION OF CORNER EVIDENCE FOUND:

Found no evidence of the original corner or its' accessories. I place the position of the corner at the centerline of Bowman Loop Road and the intersection of an existing fence line to the West.

SEE SURVEY NUMBER 017-2005

**DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED
TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:**

At position determined by survey, I set a 5/8"x30" "copper clad" iron pin with a 2 1/2" brass cap marked as shown, 36 inches in the ground, (6" below the road surface), from which:

NEW BEARING OBJECTS:

- A 5/8"x30" iron pin with 2" aluminum cap marked "BGB SURVEY MARKER NE RP" bears N 52° E, a distance of 39.71 feet.
- A 5/8"x30" iron pin with 2" aluminum cap marked "BGB SURVEY MARKER SE RP" bears S 60° E, a distance of 43.38 feet.
- A 5/8"x30" iron pin with 2" aluminum cap marked "BGB SURVEY MARKER SW RP" bears S 54° W, a distance of 36.92 feet.
- A 5/8"x30" iron pin with 2" aluminum cap marked "BGB SURVEY MARKER NW RP" bears N 50° W, a distance of 39.37 feet.

I hereby certify that the corner was monumented on August 23, 2005.


Witness: Greg Blackman, Jr., Mark Brooks, Rick Thew

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Rick G. Robinson

OREGON
July 17, 1966
RICK G. ROBINSON
2219

Renewal Date: December 31, 2006

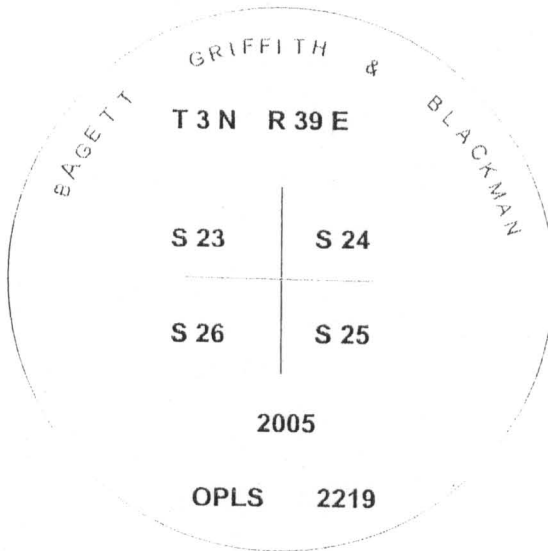

UNION COUNTY SURVEYOR

Date Received 9/15/05

Date Filed 9/15/05

Filed By *Rick G. Robinson*

File Number 032-2005 R

I used a steel tape and magnetic compass in the establishment of the new accessories. I used 18° East declination, the distances are to the center of the aluminum caps.

HORIZONTAL CONTROL DATA

UNION COUNTY, OREGON

OREGON STATE PLANE, NORTH ZONE (3601)

STA NAME: 200544

SECTION CORNER COMMON TO SECTIONS 23, 24, 25 and 26

TWP. 3 N. RGE. 39 E.

GEODETIC COORD: NAD 83(91)

DATE TIED: September 15, 2005

LAT: 45 ° 43 ' 6.15332 " N

SURVEYOR: RICK G. ROBINSON
OPLS 2219

LONG: 117 ° 53 ' 27.78850 " W

FIRM: BAGETT, GRIFFITH, & BLACKMAN
2006 Adams Avenue
La Grande, OR 97850
(541) 963-6092

SP. COOR: NAD 83(91)

N: 758768.927 INT FT.

E: 8868350.350 INT FT.

TYPE: GPS

THETA: 1 ° 51 ' 0.82506343 "

ORDER: SECOND CLASS: 1


SCALE FACTOR: 0.9999405912

ELEV: 2875.01 US FT.

ELEV: DATUM: NGVD 29

COMMENTS:

5/8"x30" copper clad iron pin with
2 1/2" brass cap monument marked:

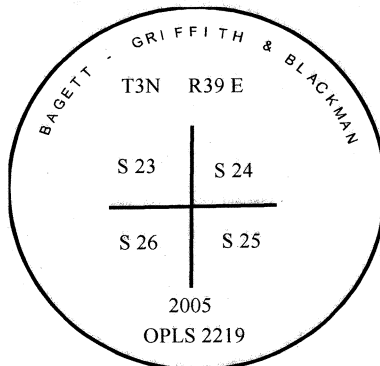

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Rick G. Robinson
OREGON
July 17, 1986
RICK G. ROBINSON
2219

Renewal Date: December 31, 2006

1 METER = 3.280833333... US FEET = 39.37 INCHES

1 METER = 3.280839895 INT'L FEET OR 1 INCH = 2.54 CM

TO CALCULATE ELEVATION FACTOR (IN THE NORTH AMERICAN CONTINENT)

DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)