

UNION COUNTY SURVEYOR  
CERTIFIED RECORD OF LAND CORNER MONUMENTATION

**HISTORY OF ORIGINAL CORNER ESTABLISHMENT:**

Corner not previously originally established.

T 3 N R 39 E R-22



No record of subsequent monumentation found in UNION COUNTY survey records.

**DESCRIPTION OF CORNER EVIDENCE FOUND:**

NONE

**SEE SURVEY NUMBER 017-2005**

**DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED**

**TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:**

At position determined by survey, I set a 5/8"x30" iron pin with a 2 1/2" aluminum cap marked as shown, 29 inches in the ground, from which:


**NEW BEARING TREES:**

A 15 inch diameter Ponderosa Pine bears S 62° E, a distance of 31.85 feet, marked W1/16 S25 BT.

A 9 inch diameter Ponderosa Pine bears N 41° W, a distance of 46.60 feet, marked W1/16 S24 BT.

I hereby certify that the corner was monumented on September 7, 2005.  
Witness: Greg Blackman, Jr., Rick Thew

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR  
*Rick G. Robinson*  
OREGON  
July 17, 1966  
RICK G. ROBINSON  
2219  
Renewal Date: December 31, 2006

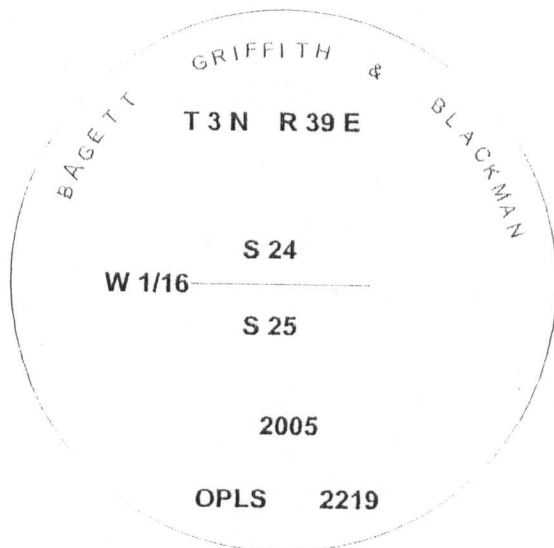

**UNION COUNTY  
SURVEYOR**  
Date Received 9/15/05  
Date Filed 9/15/05  
Filed By [Signature]  
File Number 033-2005 R

I used a steel tape and magnetic compass in the establishment of the new accessories. I used 18° East declination, the distances are to a 60d spike driven into the right side of the root crown of the new bearing trees. A brass washer marked OPLS 2219 is attached to the BT blaze of the new bearing trees.