


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHED:

Corner originally established by F. W. Campbell, U.S. Deputy Surveyor, under GLO Contract No. 498, dated March 10, 1884. Surveyor General notes state:
 Set basalt stone 8x8x8 ins 6 ins in the ground for 1/4 sec corner, marked 1/4 on W face, from which:
 A pine 10 ins diam bears S 42° W, 12 lks dist marked 1/4 S.B.T.
 A pine 6 ins diam bears N 34° E, 13 lks dist marked 1/4 S.B.T.

T 3 N R 39 E T-13



In 1982, Clayton J. Martin reestablishes this corner from found original evidence. See Union County Survey Number 46-82. Survey records state:
 Fd. 8"x8"x8" stone with 1/4 scribe laying on the ground, 6" DBH dead and down pine, N 34° E, 13 links (Orig BT) with scribes 1/4S BT clearly visible. Boise Cascade location tag on a 14" DBH Douglas Fir, S 85° W, 13.8. Not a BT.
 Set a 2 1/2" brass cap in a 2"x30" iron pipe at point for corner. New BT's
 12" DBH Ponderosa Pine, S 59° E, 23.8', scribed 1/4 S27 BT.
 14" DBH Douglas Fir, S 80° W, 13.5', scribed 1/4 S28 BT.

DESCRIPTION OF CORNER EVIDENCE FOUND:

Found a 2 1/2" iron pipe with a 2 1/2" brass cap, marked as shown below, 3" above ground in a collar of stone 1.5 feet diameter. From which:
 A 17" Ponderosa Pine bears South 60° East, a distance of 23.8 feet, alive and vigorous with scribe marks visible on partially healed blaze.
 A 21" Douglas Fir bears South 82° West, a distance of 13.5 feet, alive and vigorous with a healed blaze.

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

From the pipe monument

NEW BEARING OBJECTS:


A 10" Ponderosa Pine bears North 55° East, a distance of 51.00 feet, marked 1/4 S27 BT.
 A 6" Douglas Fir bears North 32° West, a distance of 27.75 feet, marked 1/4 S28 BT.

I hereby certify that the corner was monumented on November 3, 2015.

REGISTERED
PROFESSIONAL
LAND SURVEYOR

OREGON
June 2, 2010
JEFFREY S. HSU
83571

Renewal Date: June 30, 2017

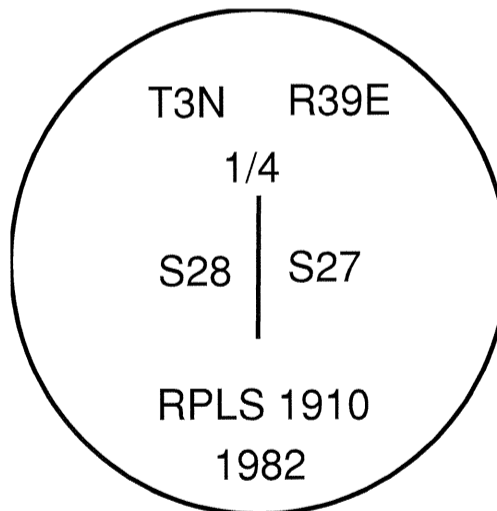

**UNION COUNTY
SURVEYOR**

Date Received 11/20/15

Date Filed 11/20/15

Filed By [Signature]

File Number 175-2015R

I used a steel tape and magnetic compass in the establishment of the new accessories. I used 15° East declination, the distances are to a 60d spike driven into the right side of the root crown of the bearing trees. A brass washer marked OPLS 83571 is attached to the BT blaze of the new bearing trees.