


**UNION COUNTY SURVEYOR
CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

Corner originally established by Frank W. Campbell under GLO contract number 498, dated May 15, 1884. GLO record states: Set post for 1/4 Sec Cor, from which:

- A Fir 8 in diam bears S 48° E, 47 Lks dist
- A Fir 12 in diam bears N 28° W, 33 Lks dist

T 3 N R 39 E T-21



Road survey and deeds acquiring right of way (Deed Volume 111, pages 246 through 254 of the deed records of Union County) make reference to the corner position.

No record of subsequent monumentation found in UNION COUNTY survey records.

DESCRIPTION OF CORNER EVIDENCE FOUND:

Found no evidence of the original corner or its' accessories. I place the position of the corner at the intersection of centerline of Bowman Loop Road and the centerline of Moses Creek Lane.

SEE SURVEY NUMBER 017-2005

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At position determined by survey, I set a 5/8"x30" "copper clad" iron pin with a 2 1/2" brass cap marked as shown, 35 inches in the ground, (5" below the road surface), from which:

NEW BEARING OBJECTS:

- A 5/8"x30" iron pin with 2" aluminum cap marked "BGB SURVEY MARKER NE RP" bears N 56° E, a distance of 46.29 feet.
- A 5/8"x30" iron pin with 2" aluminum cap marked "BGB SURVEY MARKER SE RP" bears S 22° E, a distance of 38.92 feet.
- A 5/8"x30" iron pin with 2" aluminum cap marked "BGB SURVEY MARKER SW RP" bears S 19° W, a distance of 41.90 feet.
- A 5/8"x30" iron pin with 2" aluminum cap marked "BGB SURVEY MARKER NW RP" bears N 33° W, a distance of 55.86 feet.


I hereby certify that the corner was monumented on September 2, 2005.
Witness: Greg Blackman, Jr., Mark Brooks, Rick Thew

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Rick G. Robinson

OREGON
July 17, 1906
RICK G. ROBINSON
2219

Renewal Date: December 31, 2006

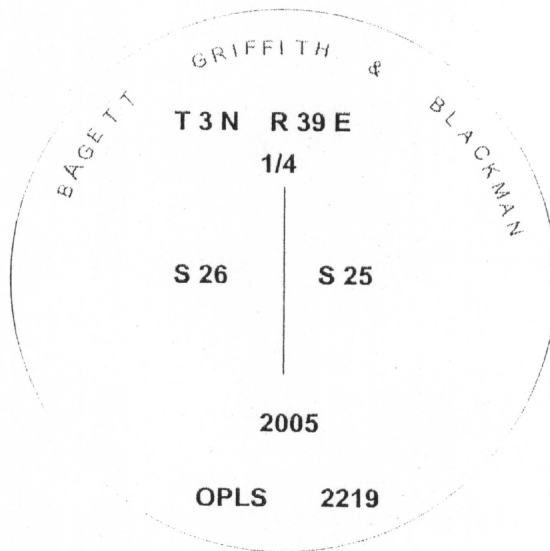

I used a steel tape and magnetic compass in the establishment of the new accessories. I used 18° East declination, the distances are to the center of the aluminum caps.

T-21

UNION COUNTY SURVEYOR

Date Received 9/15/05

Date Filed 9/15/05

Filed By *[Signature]*

File Number 036-2005R

HORIZONTAL CONTROL DATA

UNION COUNTY, OREGON

OREGON STATE PLANE, NORTH ZONE (3601)

STA NAME: 200547

1/4 SECTION CORNER COMMON TO SECTIONS 25 and 26

TWP. 3 N. RGE. 39 E.

GEODETIC COORD: NAD 83(91)

DATE TIED: September 15, 2005

LAT: 45 ° 42 ' 40.18643 " N

SURVEYOR: RICK G. ROBINSON
OPLS 2219

LONG: 117 ° 53 ' 26.99124 " W

FIRM: BAGETT, GRIFFITH, & BLACKMAN
2006 Adams Avenue
La Grande, OR 97850
(541) 963-6092

SP. COOR: NAD 83(91)

N: 756142.042 INT FT.

E: 8868491.810 INT FT.

TYPE: GPS

THETA: 1 ° 51 ' 1.39047212 "

ORDER: SECOND CLASS: 1


SCALE FACTOR: 0.9999393896

ELEV: 2873.18 US FT.

ELEV: DATUM: NGVD 29

COMMENTS:

5/8"x30" copper clad iron pin with
2 1/2" brass cap monument marked:

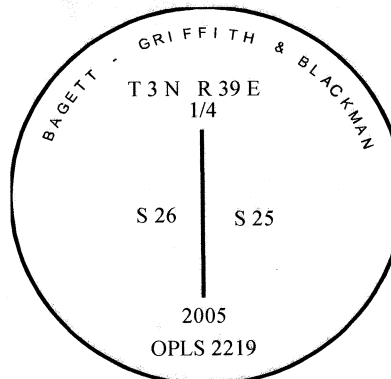

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Rick G. Robinson
OREGON
July 17, 1986
RICK G. ROBINSON
2219

Renewal Date: December 31, 2006

1 METER = 3.2808333333... US FEET = 39.37 INCHES

1 METER = 3.280839895 INT'L FEET OR 1 INCH = 2.54 CM

TO CALCULATE ELEVATION FACTOR (IN THE NORTH AMERICAN CONTINENT)

DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)