


**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

**HISTORY OF ORIGINAL CORNER ESTABLISHED:**

Corner originally established by F. W. Campbell under GLO contract number 498 dated March 10, 1884. Surveyor General field notes state:

Set pine post 3 ft. long, 3 ins. square 24 ins in the ground for 1/4 Sec. corner marked 1/4 S on N. face, from which:  
A pine 9 ins. diam. bears N25°W, 31 lks. dist. marked 1/4 S BT.  
A pine 15 ins. diam. bears S5°W, 62 lks. dist. marked 1/4 S BT.

T 3 N R 39 E V-19



**DESCRIPTION OF CORNER EVIDENCE FOUND:**

None. From a proportionate position, a fence corner from which fences run North, East and West bears N14°W, 17 ft. A fence corner from which fences run West and South bears N48°E, 24 ft. And old fence corner from which fences run North and East falls approximately 60 feet, wire down.

SEE SURVEY NUMBER 018-2020

**DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO MONUMENT THE ORIGINAL LOCATION OF THIS CORNER:**

At proportionate position, I set a 2 1/2" aluminum pipe, 28" in the ground, with 3" aluminum cap marked as shown below, from which:


**NEW BEARING OBJECTS:**

A 3" Ponderosa Pine bears North 37° East, a distance of 74.20 feet, marked X BT.  
A 6" Ponderosa Pine bears South 33° East, a distance of 44.00 feet, marked 1/4 S35 BT.  
A 5/8"x30" iron pin bears South 38°29' West, a distance of 22.82 feet with 1 1/2" aluminum cap marked SW RP.  
A 5/8"x30" iron pin bears North 35°39' West, a distance of 16.88 feet with 1 1/2" aluminum cap marked NW RP.

Set a steel fencepost approx. 1 ft. South of monument.  
I hereby certify that the corner was monumented on May 29, 2020.  
Witness: Kyle A. Tucker



Renewal Date: June 30, 2021

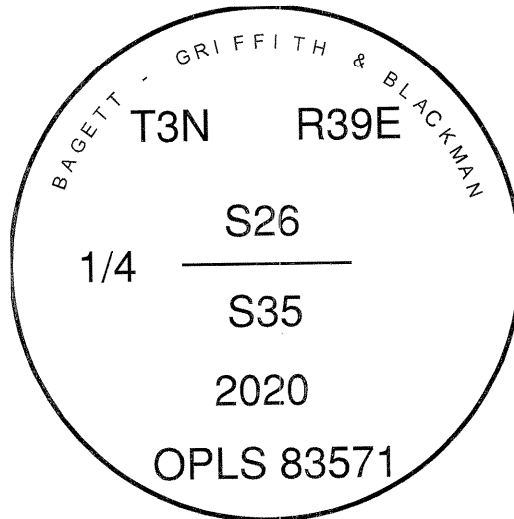

**UNION COUNTY SURVEYOR**

Date Received 6/1/2020

Date Filed 6/1/2020

Filed By [Signature]

File Number 042-2020R

I used a steel tape and magnetic compass in the establishment of the bearing tree accessories. I used 14° East declination, the distances are to a 60d spike driven into the side of the root crown of the bearing trees. A brass washer marked OPLS 83571 is attached to the BT blaze of the new bearing trees. I use a Leica GS18 RTK unit to establish the rebar accessories. Basis of bearings is as per Survey Number 018-2020.

# HORIZONTAL CONTROL DATA

## UNION COUNTY, OREGON

### OREGON STATE PLANE, NORTH ZONE (3601)

STA NAME: 2020033

1/4 SECTION CORNER COMMON TO SECTIONS 34 AND 35

TWP. 3 N RGE. 39 E.

GEODETIC COORD: NAD 83(91)

DATE TIED: June 1, 2020

LAT: 45 ° 42 ' 13.96432 " N

SURVEYOR: JEFFREY S. HSU  
OPLS 83571

LONG: 117 ° 54 ' 4.02971 " W

FIRM: BAGETT, GRIFFITH, & BLACKMAN  
2006 ADAMS AVENUE  
LAGRANDE, OR 97850  
(541) 963-6092

SP. COOR: NAD 83(91)

N: 753402.795 INT FT.

E: 8865950.425 INT FT.

TYPE: GPS

THETA: 1 ° 50 ' 35.1233016 "

ORDER: SECOND CLASS: 1



SCALE FACTOR: 0.9999381924

ELEV: 2872.74 US FT.

ELEV: DATUM: NGVD 29

COMMENTS:

2 1/2" aluminum pipe with 2 1/2" aluminum cap  
marked as shown

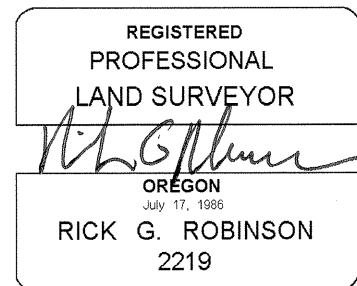

Renewal Date: December 31, 2020

1 METER = 3.2808333333... US FEET = 39.37 INCHES

1 METER = 3.280839895 INT'L FEET OR 1 INCH = 2.54 CM

TO CALCULATE ELEVATION FACTOR ( IN THE NORTH AMERICAN CONTINENT)

DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)