


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

INDEX: T-13

History of original corner establishment:

A. Corner established by US Deputy Surveyor Herman D. Cradon under his contract number 517 dated Sept. 30, 1884. Surveyor General's Record states: Var. 20E Set a post 3.5 ft. long, 3 ins. square, 24 ins. in the ground, for 1/4 sec. cor., marked 1/4 S on W. face; from which

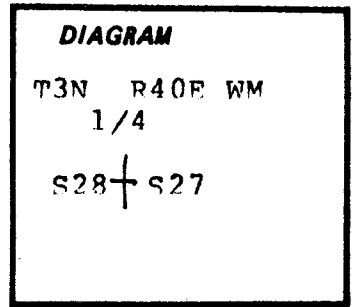

A fir, 8 ins. diam., bears S.25E., 6 lks. dist., marked 1/4 S BT
A fir, 5 ins. diam., bears N.70W., 11 lks. dist., marked 1/4 S BT

Description of corner evidence found:

B. MONUMENT FOUND:

none; area has been logged in the past.

ACCESSORIES FOUND:

none; northeasterly of the proportionate position approximately 100 feet is a live fir with four sides blazed and well healed. No original evidence found.

Description of monument and accessories established to perpetuate the original location of this corner:

C. After diligent search for original evidence, I set the corner at the single proportionate position. I set a 2.5 inch dia. by 30 inch. long aluminum monument 25 inches in the ground. No stones available.

I mark the cap: T3N R40E WM 1/4

S28 + S27 1989

STRYKER PLS 2060

NEW ACCESSORIES ESTABLISHED with magnetic declination of 19 deg. East 15" dia western larch bears N50E at 22.4 ft scribed "1/4 S27 BT" 17" dia douglas fir bears N34W at 33.5 ft scribed "1/4 S28 BT"

Painted red band around each bearing tree. Placed brass washer marked "PLS 2060" at base of each new BT blaze Placed LAND SURVEYOR MEMBER LSAW metal signs on each bearing tree Placed steel fence post at corner.

Office of..... County of.....
State of....., I hereby certify that the within instrument was filed in this office for record on the..... day of.....

(COUNTY OFFICIAL) by

Union County Surveyor (Deputy) stamp with fields for Date Received (8-30-89), Date Filed (9-1-89), By (G. LANGLITZ DEPUTY), and File No. (166-89 R)

Registered Professional Land Surveyor stamp for Edwin A. Stryker, Oregon, July 15, 1983, No. 2060, with signature.