

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by Herman D. Gradon under contract 517, dated September 30, 1884.

Record States:

Set basalt stone 18x10x10 ins., 12 ins. in the ground for 1/4 sec. cor., marked 1/4 on N. face.


From Which:

A pine, 30 ins. diam., bears N. 44° E., 21 lks. dist.

A pine, 30 ins. diam., bears S. 54° W., 45 lks. dist.

Township 3 North, Range 40 East

V-3

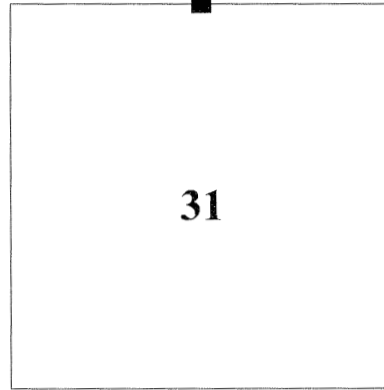

Subsequent survey:

None found.

Description of evidence found:

None found. This corner established by survey as defined in the 2009 Manual of Surveying Instructions.



Description of monument and accessories established to perpetuate the location of this corner.

At position determined by survey, I set a 2 ins. diam. aluminum cap, on a 5/8 ins. diam. x 30 ins long iron rod, marked as shown. From which:

A ponderosa pine, 15 ins. diam., bears N. 51° E., 35.7 ft. dist., marked "XBT".

A ponderosa pine, 20 ins. diam., bears S. 17° E., 28.6 ft. dist., marked "1/4S31BT".

A 5/8" x 30" long iron rod with yellow plastic cap marked "BROCKAMP LAND SURVEYING PLS 78556" bears S. 62° W., 14.6 ft. dist.

A 5/8" x 30" long iron rod with yellow plastic cap marked "BROCKAMP LAND SURVEYING PLS 78556" bears N. 45° W., 12.7 ft. dist.

Corner position falls in mostly level pasture, fence corners W&S, N. 15° E., 68.0 ft. dist.

Bearings are made with a hand compass, magnetic declination = 15°E.

I hereby certify that the above corner point was perpetuated as herein described on 6/17/2018.

Witnessed by:

Matt Brockamp, LS

Austin Brockamp

REGISTERED
PROFESSIONAL
LAND SURVEYOR

OREGON
MAY 20, 2015
MATTHEW R. BROCKAMP
78556

Registration expires 12/31/2019

UNION COUNTY SURVEYOR	
Date Received	<u>7/19/18</u>
Date Filed	<u>9/13/18</u>
Filed By	<u>Nich G. Miller</u>
File Number	<u>052-2018R</u>

