


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Original corner set by Herman D. Gradon under contract No. 517 dated September 30, 1884.
Record States:
Set post for sec. cor.
From Which:
A fir, 24 ins. diam., bears N. 30° E., 27 lks. dist.
A pine, 10 ins. diam., bears S. 15° E., 42 lks. dist.
A tamarack, 27 ins. diam., bears S. 75° W., 69 lks. dist.
A fir, 18 ins. diam., bears N. 46° W., 18 lks. dist.

Township 3 North, Range 40 East
V-9

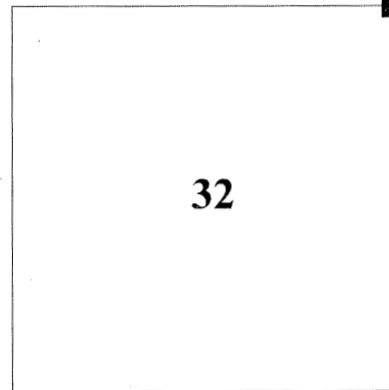

Subsequent survey:

None found



Description of evidence found:

Found deteriorated fir stump remains of original NW BT with visible scribe.

Description of monument and accessories established to perpetuate the location of this corner.

At record bearing and distance from Original NW. bearing tree remains, I set a 2 ins. diam. aluminum cap, on a 5/8 ins. diam. x 30 ins long iron rod, marked as shown.

From which:

A tamarack, 13 ins. diam., bears N. 50 E., 24.2 ft. dist., marked "1/4S28BT" on a single blaze.
A 5/8" x 30" long iron rod with yellow plastic cap marked "BROCKAMP LAND SURVEYING PLS 78556" bears S. 45° E., 9.9 ft. dist.
A 5/8" x 30" long iron rod with yellow plastic cap marked "BROCKAMP LAND SURVEYING PLS 78556" bears S. 45° W., 9.9 ft. dist.
A Douglas fir, 5 ins. diam., bears N. 88 W., 48.0 ft. dist., marked "X BT" on a double blaze.


Corner position falls in timber on mostly level ground in E-W fence.

Bearings are made with a hand compass, magnetic declination = 15°E.


I hereby certify that the above corner point was perpetuated as herein described on 5/18/2018.

Witnessed by:
Matt Brockamp, LS
Austin Brockamp

REGISTERED
PROFESSIONAL
LAND SURVEYOR


OREGON
MAY 20, 2015
MATTHEW R. BROCKAMP
78556

Registration expires 12/31/2019

UNION COUNTY SURVEYOR	
Date Received	7/19/18
Date Filed	9/13/18
Filed By	
File Number	054-2018R

