

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


HISTORY OF ORIGINAL CORNER ESTABLISHED:

Corner was originally established under GLO contract number No. 517, dated September 30, 1884, executed by Herman Gradon. Surveyor General field notes state:

Set a basalt stone 12x12x8 ins. 8 ins in the ground. for cor. to Secs 26, 27, 34 & 35, marked with 1 notch on S and 2 notches on E edges, from which:

- A tamarack 18 ins. in diam. bears N11°E., 21 lks dist. marked T3N R40E S26BT.
- A fir 10 ins. in diam. bears S20E., 36 lks dist. marked T3N R40E S35 BT.
- A fir 10 ins. in diam bears S5W, 40 lks dist. marked T3N R40E S34 BT.
- A fir 12 ins. in diam. bears N13W. 15 lks dist. marked T3N R40E S27 BT.

T 3 N R 40 E V-17



DESCRIPTION OF CORNER EVIDENCE FOUND:

Found remains of a decaying tamarack stump, approx. 23" in diameter. Scribes visible on decaying downed portion. At record bearing and distance from this tree, I find a volcanic stone 12"x12"x8", with no chisel marks evident. Stone is of a type that is dissimilar from surrounding stone.

SEE SURVEY NUMBER CS 2019-019(Wallowa Co)/SURVEY NUMBER 022-2025(Union Co)
DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO MONUMENT THE ORIGINAL LOCATION OF THIS CORNER:


At position of found stone, I set a a 2 1/2" x 30" aluminum pipe with a 3" aluminum cap, marked as shown below, 27" in the ground, in a collar of stone 2 ft. diam., from which:

NEW BEARING OBJECTS:

- A 12" Douglas Fir bears North 17° East, a distance of 23.15 feet, marked T3N R40E S26 BT
- A 13" Douglas Fir bears South 87° East, a distance of 48.15 feet, marked T3N R40E S35 BT
- A 15" Douglas Fir bears South 54° West, a distance of 27.80 feet, marked T3N R40E S34 BT
- A 15" Douglas Fir bears North 51° West, a distance of 32.00 feet, marked T3N R40E S27 BT

I hereby certify that the corner was monumented on June 17th, 2025

Witness: Kyle Tucker, Adam Gordon

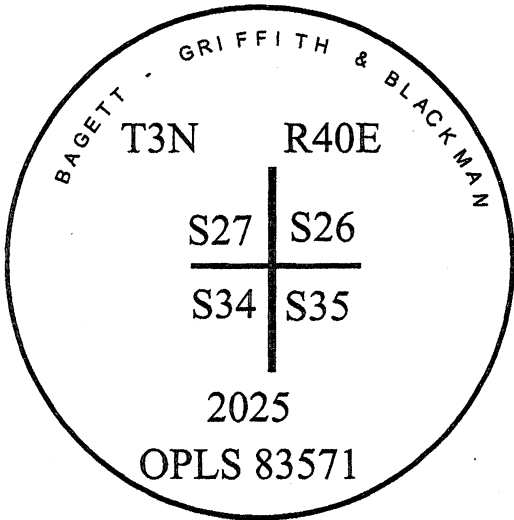

REGISTERED
PROFESSIONAL
LAND SURVEYOR

OREGON
June 2, 2010
JEFFREY S. HSU
83571

Renewal Date: June 30, 2027

I used a tape and compass in the establishment of the new bearing trees. 14° East was used for declination. Bearings measures to a brass washer marks OPLS 83571 in the BT blaze. Distance measured to a 60d spike in the side of the tree.

UNION COUNTY
SURVEYOR

Date Received 6/26/25

Date Filed 6/26/25

Filed By

File Number 021-2025R