


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

In 1882, under GLO Contract No. 451, Rufus S. Moore set a post, from which an 11" Tamarack bears N70°E, 20 lks.; an 11" Tamarack bears S30°E, 7 lks.; a 20" Tamarack bears S28°W, 14 lks.; and a 20" Fir bears N14°W, 20 lks.

Index File No. E-17

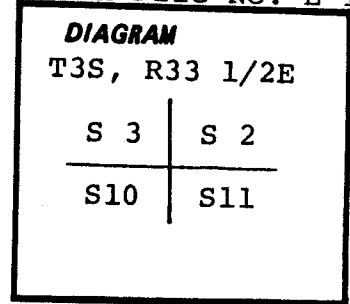


Description of corner evidence found:

A BLM 3 1/4" brass cap on a 2 1/2" iron pipe rising 6", stamped:

Bearing Trees found:

- A 10.2" D. Fir bears N56°W, 11.8 ft., blaze healed, B&S partly visible.
- A 10.8" D. Fir bears N60°E, 28.6 ft., blaze healed, portion of scribe visible.

T3S R33 1/2E



1977

Description of monument and accessories I established to perpetuate the original location of this corner:

New BT's:

- An 8.3" D. Fir bears S65°W, 2.3 ft. scribed T3S R33 1/2E S10BT
- An 11.7" D. Fir bears S60°E, 16.5 ft. scribed T3S R33 1/2E S11 BT

Painted Blazes and attached signs as per Standard Specifications for Cadastral Surveys, USFS Region 6, March, 1982.

Compass Declination: 19 1/2°E

Witness: N. Petz

Unnumbered road across from 2115-240, 1/4 mi. north of 5427. Tag on 10" L. Pine on right. Corner is 300 ft. west.

REGISTERED
PROFESSIONAL
LAND SURVEYOR

B. A. Sutton
OREGON
JULY 18, 1979
B. A. SUTTON
1848

I hereby certify the above described corner monument and/or accessories was established as described on September 14, 1983.

Office of..... County of.....
State of....., I hereby certify that the within instrument was filed in this office
for record on the..... day of....., 19.....

..... by
(COUNTY OFFICIAL) (DEPUTY)

UNION COUNTY SURVEYOR	
Date Received 7-2-84	<u>7-2-84</u>
Date Filed	<u>7-3-84</u>
By	<u>G. LANGLITZ, DEPUTY</u>
File No.	<u>886-84 R</u>

Remonumentation of Certain Original Corner Points,
T. 3 S., R. 33 1/2 E., Willamette Meridian, Oregon

CHAINS

At the corner point

Set an iron post, 28 ins. long, 2 1/2 ins. diam., 8 ins. in the ground, to solid rock, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.

T 3 S R 33 1/2 E
1/4
S 2 | S 1
1977

from which new bearing trees

A pine, 15 ins. diam., bears N. 60° E., 40 lks. dist., mkd. 1/4 S1 BT.

A pine, 18 ins. diam., bears N. 59° W., 114 lks. dist., mkd. 1/4 S2 BT.

The cor. of secs. 2, 3, 10, and 11, determined at record bearing and distance from the remains of the original bearing trees:

A root hole, bears N. 70° E., 20 lks. dist., with a down pine alongside, 12 ins. diam., with scribe marks BT visible on open blaze. (Record, larch)

A root hole, bears S. 30° E., 7 lks. dist., with a down pine alongside, 13 ins. diam., with scribe marks S11 visible on open blaze. (Record, larch)

At the corner point

Set an iron post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.

T 3 S R 33 1/2 E
S 3 | S 2
S 10 | S 11
1977

from which new bearing trees

A grand fir, 8 ins. diam., bears N. 60° E., 43 lks. dist., mkd. T3S R33 1/2 E S2 BT.

A grand fir, 11 ins. diam., bears S. 60° E., 25 lks. dist., mkd. T3S R33 1/2 E S11 BT.

A grand fir, 6 ins. diam., bears S. 65° W., 4 lks. dist., mkd. T3S R33 1/2 E S10 BT.

A grand fir, 7 ins. diam., bears N. 56° W., 17 lks. dist., mkd. T3S R33 1/2 E S3 BT.

T3S33 1/2 E17

UNION COUNTY
SURVEYOR

Date Received 3/15/13

Date Filed 3/15/13

By [Signature] DEPUTY

File No. 365-2012R