


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

Index File No. J-17

History of original corner establishment:

In 1882, under GLO Contract No 451, Rufus S. Moore set a stone 18x10x8, from which a 12" Fir bears S68°E, 41 lks.; a 20" Fir bears N36°E, 72 lks.; a 4" Fir bears N69°W, 8 lks.; and a 36" Fir bears S42°W, 34 lks.

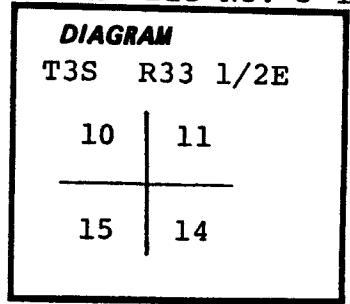


Description of corner evidence found:

Found BLM 3 1/4" brass cap on 2 1/2" iron pipe rising 7", stamped: with original stone along south side.

BT's Found:

- A 17.2" D. Fir bears N69°W, 5.7 ft. with healed blaze
- A stump 6 ft. high bears N36°E, 72 lks, original BT
- A 9.8" D. Fir bears N44.5°E, 47.3 ft. scribed "T3S R33 1/2E S11 BT"
- A dead standing Fir bears S68°E, 34 lks., original BT
- A 36" log bears S42°W, 34 lks. original BT, dead and down.
- An 11.5" D. Fir bears S76°W, 15.0 ft., scribed "T3S R33 1/2E S15 BT"

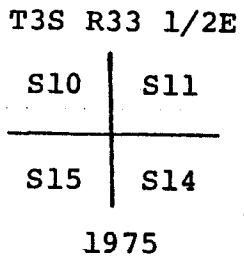

Description of monument and accessories established to perpetuate the original location of this corner:

Buried original stone along north side of brass cap.

New BT:

- A 6.4" D. Fir bears S51°E, 60.9 ft., scribed T3S R33 1/2E S14 BT

Painted blazes and attached signs as per Standard Specifications for Cadastral Surveys, USFS Region 6, March, 1982.

Compass Declination: 19 1/2°E

Witness: N. Petz

From 2115, take 2115-235 southeasterly 1/4 mi. Take 2115-239 northerly and easterly 1/2 mi. 12" D. Fir on the right. Corner is 80 ft. west.

I hereby certify the above described corner monument and/or accessories was established as described on September 14, 1983.

REGISTERED
PROFESSIONAL
LAND SURVEYOR

B. A. Sutton

OREGON
JULY 13, 1979
B. A. SUTTON
1848

Office of..... County of.....
 State of....., I hereby certify that the within instrument was filed in this office
 for record on the..... day of....., 19.....
 by
 (COUNTY OFFICIAL) (DEPUTY)

**UNION COUNTY
SURVEYOR**

Date Received 7-2-84

Date Filed 7-3-84

By G. LANGLITZ, DEPUTY

File No. 887-84R

Remonumentation of Certain Original Corner Points,
T. 3 S., R. 33 1/2 E., Willamette Meridian, Oregon

CHAINS

At the corner point

Set an iron post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.

T 3 S R 33 1/2 E
S 22 | S 23
S 27 | S 26
1975

from which new bearing trees

A fir, 6 ins. diam., bears N. 7 1/2° E., 17 lks. dist., mkd. T3S R33 1/2 E S23 BT.

A fir, 9 ins. diam., bears N. 34 1/2° W., 48 lks. dist., mkd. T3S R33 1/2 E S22 BT.

The 1/4 sec. cor. of secs. 14 and 23, monumented with a basalt stone, 16 x 13 x 8 ins., firmly set 4 ins. in the ground, no marks visible, from which the remains of the original bearing trees:

A root hole, bears S. 68° E., 117 lks. dist., with a down and decayed pine alongside, 10 ins. diam., with scribe marks BT visible on decayed blaze.

A pine snag, 15 ins. diam., bears N. 84° W., 80 lks. dist., with scribe marks 1/4 S visible on partially healed blaze.

At the corner point

Set an iron post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.

T 3 S R 33 1/2 E
1/4 S 14
S 23
1975

from which new bearing trees

A pine, 10 ins. diam., bears S. 61 1/2° E., 79 lks. dist., mkd. 1/4 S23 BT.

A pine, 7 ins. diam., bears N. 75 1/2° W., 32 lks. dist., mkd. 1/4 S14 BT.

Deposit corner stone alongside iron post.

The cor. of secs. 10, 11, 14, and 15, monumented with a basalt stone, 13 x 10 x 8 ins., firmly set 7 ins. in the ground, no marks visible, from which the remains of the original bearing trees:

A decayed fir stump, 14 ins. diam., bears N. 36° E., 72 lks. dist., with scribe marks T3S R33 1/2 E S11 visible on decayed blaze.

A fir, 22 ins. diam., bears S. 68° E., 34 lks. dist., with healed blaze. (Record, 41 lks.)

A root hole, bears S. 42° W., 34 lks. dist., with a down and decayed fir alongside, 36 ins. diam., no marks visible.

UNION COUNTY SURVEYOR

Date Received 3/15/13

Date Filed 3/15/13

By [Signature] DEPUTY

2013R

File No. 367-2013R

Remonumentation of Certain Original Corner Points,
T. 3 S., R. 33½ E., Willamette Meridian, Oregon

CHAINS

A fir, 14 ins. diam., bears N. 69° W., 8 lks.
dist., with healed blaze.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T 3 S R 33½ E
S 10 | S 11
S 15 | S 14
1975

from which new bearing trees

A fir, 8 ins. diam., bears N. 44½° E., 72 lks.
dist., mkd. T3S R33½E S11 BT.

A white fir, 10 ins. diam., bears S. 76° W.,
23 lks. dist., mkd. T3S R33½E S15 BT.

Deposit corner stone alongside iron post.

UNION COUNTY
SURVEYOR

Date Received 3/15/13

Date Filed 3/15/13

By [Signature] DEPUTY

File No. 367-2013R