


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment: Corner established by Rufus S. Moore under General Land Office contract number 451, dated June 12, 1882. Surveyor General record state:

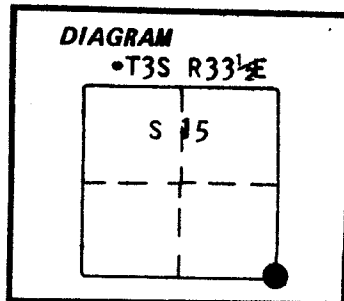

Set a pine post 4 feet long 4" square 24" in the ground for cor to secs 14-15-22-23 marked T3S S14 on NE, R33 1/2 E S23 on SE, S22 on SW and S15 on NW faces with 3 notches on South and 2 notches on E edges from which;

- A pine 12" diameter bears S78°E 18 lks dist marked T3S R33 1/2 E S23 BT
- A pine 10" diameter bears S24°W 20 lks dist marked T3S R33 1/2 E S22 BT
- A pine 10" diameter bears N48°E 85 lks dist marked T3S R33 1/2 E S14 BT
- A pine 10" diameter bears N80°W 30 lks dist marked T3S R33 1/2 E S15 BT

No record of subsequent remonumentation found in county records.

Description of corner evidence found:  
NONE

This area is covered with dead and down lodgepole pine. This is second growth-all of the original trees are gone

**UNION COUNTY SURVEYOR**

---

Date Received 4-30-86

Date Filed 5-1-86

By G. LANGWITZ DEPUTY

File No. 14-86 R

See map of survey dated 4-86.


Description of monument and accessories I established to perpetuate the original location of this corner: At proportionate position, I set a 2 1/2"x30" aluminum pipe with aluminum cap marked as shown 29 inches in the ground from which;

New BTs and B0s

- A 6 inch diameter lodgepole pine bears N46°E 87.22 feet marked S14 BT
- A 5/8"x30" iron pin with plastic cap marked BGA SURVEY MARKER bears S49°E 9.45 feet
- A 5/8"x30" iron pin with plastic cap marked BGA SURVEY MARKER bears S30°W 7.30 feet
- A 6 inch diameter Lodgepole pine bears N10°W 51.01 feet marked S15 BT

Set steel fenceposts approximately 5 feet West with 54-2 sign and approximately 5 feet South with 54-2 and 54-9 signs attached

Corner set April 15, 1986  
Witnesses: Greg Blackman and Rick Robinson

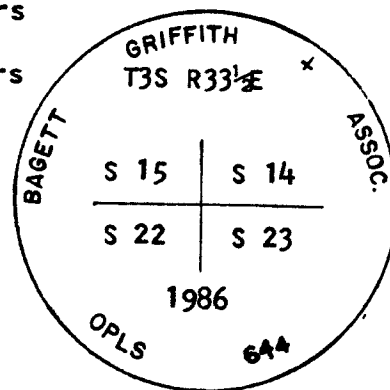

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

Duane J. Griffith

OREGON  
JULY 10, 1984  
DUANE J. GRIFFITH  
644

Brass washer marked OPLS 644 nailed to Bt blaze. Used steel tape and magnetic compass with 20° East declination. Distances to the BTs are to a 50d spike set in right side of tree when facing tree, unless otherwise stated.

Office of..... County of.....  
 State of....., I hereby certify that the within instrument was filed in this office  
 for record on the..... day of....., 19.....  
 ..... by .....

(COUNTY OFFICIAL) (DEPUTY)