


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner not previously established.

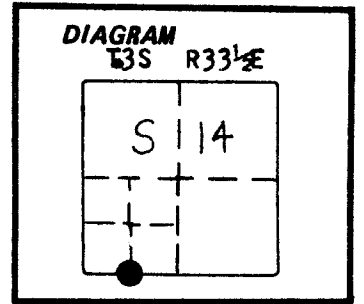

Description of corner evidence found:

None.

UNION COUNTY SURVEYOR	
Date Received	<u>4-30-86</u>
Date Filed	<u>5-1-86</u>
By	<u>G. LANGLITZ, DEPUTY</u>
File No.	<u>15-86 R</u>

See map of survey dated 4-86.

Description of monument and accessories I established to perpetuate the original location of this corner: At position determined by survey I set a 2 1/2"x30" aluminum pipe with aluminum cap marked as shown below, 12" in the ground with a mound of stone 4 feet at the base to top of cap, from which:

A 6" diameter Lodgepole Pine bears S 50° E, 107.89 feet, marked X BT.


A 14" diameter Ponderosa pine bears N 3° W, 134.61 feet, marked W 1/16 S 14 BT.

Set steel fence post approximately 5 feet East with a 54-2 and 54-9 sign attached.

Set steel fence post approximately 5 feet South with a 54-2 sign attached.

Corner set 4-17-86

Witness: Rick Robinson, Greg Blackman

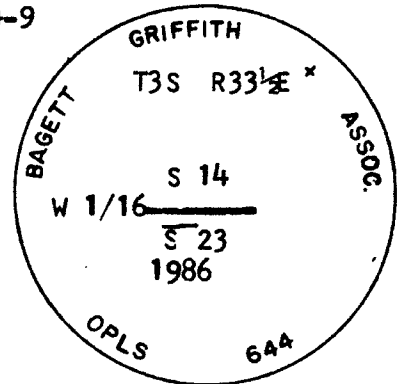

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

OREGON  
JULY 10, 1964  
DUANE I. GRIFFITH  
644

Brass washer marked OPLS 644 nailed to BT blaze. Used steel tape and magnetic compass with 20° East declination. Distances to the BTs are to a 50d spike set in right side of tree when facing tree, unless otherwise stated.

Office of..... County of.....

State of....., I hereby certify that the within instrument was filed in this office

for record on the..... day of....., 19.....

..... by .....

(COUNTY OFFICIAL)

(DEPUTY)