


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner not previously established.



Description of corner evidence found:

None.

UNION COUNTY SURVEYOR

Date Received 4-30-86

Date Filed 5-1-86

By G. LANGLITZ, DEPUTY

File No. 19-86 R

See map of survey dated 4-86.

Description of monument and accessories I established to perpetuate the original location of this corner: At proportionate position, I set a 2 1/2"x30" aluminum pipe with aluminum cap marked as shown below, 30" in the ground, from which:


A 16" Douglas Fir bears N 61° E, 46.81 feet, marked X BT.

A 12" Douglas Fir bears S 11° E, 31.74 feet, marked 1/4 S 22 BT.

Set a steel fence post approximately 5 feet North with a 54-2 and a 54-9 sign attached.

Set a steel fence post approximately 5 feet East with a 54-2 sign attached.

Corner set 4-15-86
Witness: Rick Robinson

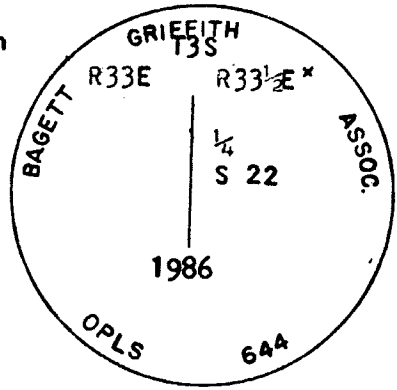

REGISTERED PROFESSIONAL LAND SURVEYOR

Duane I. Griffith

OREGON
JULY 10, 1964
DUANE I. GRIFFITH
644

Brass washer marked OPLS 644 nailed to BT blaze. Used steel tape and magnetic compass with 20° East declination. Distances to the BTs are to a 50d spike set in right side of tree when facing tree, unless otherwise stated.

Office of..... County of.....
 State of....., I hereby certify that the within instrument was filed in this office
 for record on the..... day of....., 19.....
 by
 (COUNTY OFFICIAL) (DEPUTY)