


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment: Corner established by Rufus S. Moore under General Land Office contract number 451, dated June 12, 1882. Surveyor General record state:

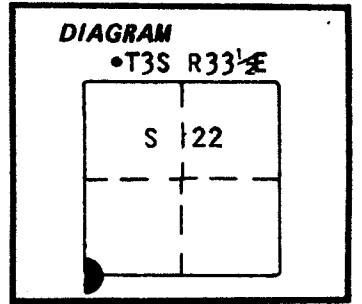

Set a post 4" square firmly set in the ground marked T3S R33E on E, S22 on N and S27 on South faces with 4 notches on North and 2 notches on South edges from which:

A tamarack 7 " diam bears N53°E 20 lks dist marked T3S R33E S22 BT

A fir 6" diam bears S72°E 33 lks dist marked T3S R33E S27 BT

No record of subsequent remonumentation found in county records.

Description of corner evidence found:

NONE

UNION COUNTY SURVEYOR	
Date Received	<u>4-30-86</u>
Date Filed	<u>5-1-86</u>
By	<u>G. LANGLITZ, DEPUTY</u>
File No.	<u>22-86 R</u>

See map of survey dated 4-86.

Description of monument and accessories I established to perpetuate the original location of this corner:

At proportionate position I set a 2 1/2"x30" aluminum pipe with aluminum cap marked as shown 28 inches in the ground in a small mound of stone from which:

New BTs


A 22 inch diameter red fir bears N35°E 83.85 feet marked T3S R33E S22 BT

A 16 inch diameter red fir bears East 61.89 feet marked T3SR33E S27BT

Set a steel fencepost approximately 5 feet North with 54-4 sign

Corner set April 21, 1986

Witnesses: Greg Blackman and Rick Robinson

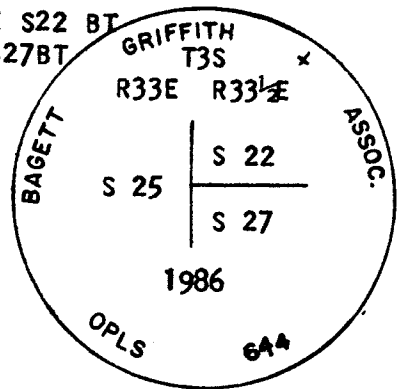

REGISTERED PROFESSIONAL LAND SURVEYOR

OREGON JULY 10, 1964
DUANE I. GRIFFITH
644

Brass washer marked OPLS 644 nailed to Bt blaze. Used steel tape and magnetic compass with 20° East declination. Distances to the BTs are to a 50d spike set in right side of tree when facing tree, unless otherwise stated.

Office of..... County of.....
State of....., I hereby certify that the within instrument was filed in this office
for record on the..... day of....., 19.....

(COUNTY OFFICIAL)

(DEPUTY)