


CERTIFIED RECORD OF LAND CORNER DOCUMENTATION

History of original corner establishment: Corner established by Rufus S. Moore under General Land Office contract number 451, dated June 12, 1882. Surveyor General record state:

Set basalt stone 16"x12"x9" 12 inches in the ground for 1/4 sec cor marked 1/4 on N. face from which:

- A pine 38" diameter bears North 52 lks dist marked 1/4 S BT
- A pine 10" diameter bears S80W 27 lks dist marked 1/4 S BT

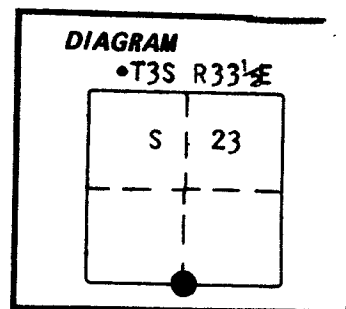

No record of subsequent remonumentation found in county records.

Description of corner evidence found:

Found stone 12"x12"x6" marked 1/4

Found 12" + P.Pine S80W 17.8 feet dead and down, scribes visible
Found 30" P.Pine stump North 34 feet, cut below the blaze

UNION COUNTY SURVEYOR

Date Received 4-30-86

Date Filed 5-1-86

By G. LANGRITZ, DEPUTY

File No. 23-86 R

See map of survey dated 4-86.

Description of monument and accessories I established to perpetuate the original location of this corner: At stone position, I set a 2 1/2"x30" aluminum pipe with aluminum cap marked as shown 30 inches in the ground with a small ring of stone from which;


New BTs

- A 13 inch diameter red fir bears S83°E 56.73 feet marked 1/4 S26 BT
- A 12 inch diameter red fir bears N16°W 16.70 feet marked 1/4 S23 BT

Set a steel fencepost approximately 5 feet North with a 54-4 sign attached

Corner set April 9, 1986

Witnesses; Greg Blackman and Rick Robinson

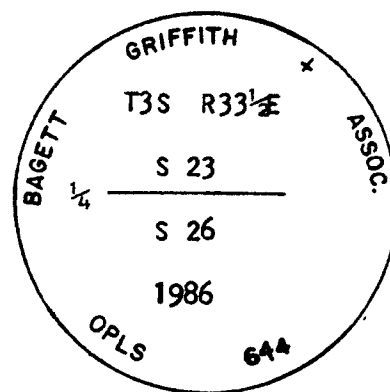

REGISTERED PROFESSIONAL LAND SURVEYOR

OREGON
JULY 10, 1964
DUANE I. GRIFFITH
644

Brass washer marked OPLS 644 nailed to Bt blaze. Used steel tape and magnetic compass with 20° East declination. Distances to the BTs are to a 50d spike set in right side of tree when facing tree, unless otherwise stated.

Office of..... County of.....
State of....., I hereby certify that the within instrument was filed in this office
for record on the..... day of....., 19.....

..... by
(COUNTY OFFICIAL) (DEPUTY)