


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

Index File No. R-21

History of original corner establishment:

In 1882, under GLO Contract No. 451, Rufus S. Moore set a stone 18x18x12, from which a 30" Pine bears N55°W, 40 lks.; a 6" Pine bears N69°E, 71 lks.; a 20" Pine bears S88°E, 181 lks.; and a 10" Pine bears S42°W, 78 lks.

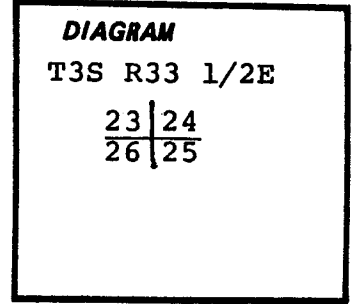

Description of corner evidence found:

Found BLM 3 1/2" brass cap on 2 1/2" iron pipe rising 12", stamped:  
Found original stone with notches along side.

T3S R33 1/2E

Bearing trees found:

- A 15" W. Fir bears N55 1/4°W, 27.1 ft., scribing visible "T3S R33 1/2E S23 BT".
- An 8.5" W. Fir bearing N61°E, 15.8 ft., blaze partially healed, scribe visible.
- A 26" Fir bearing S88°E, 181 lks., Dead standing, blaze healed "BT" visible.
- An 8" W. Fir bearing S63°E, 139.9 ft., B&S visible, partially healed.
- An 18" Fir bearing S66°W, 31.4 ft., blaze partially healed and pitched over.

S23	S24
S26	S25
1975	

Description of monument and accessories | established to perpetuate the original location of this corner:

Painted blazes and attached signs as per Standard Specifications for Cadastral Surveys, USFS Region 6, March 1982. Set metal fence post 4 ft. north of corner.

Compass Declination: 19 1/2°E  
Witness: J. Sutton

From 2115-108, take 2115-075 southwesterly .6 mi. There is a lodgepole on the SE bank of the road. From there go south 60 ft. to the corner.

I hereby certify the above described corner monument and/or accessories was established as described on May 29, 1984.

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

OREGON  
JULY 13, 1979  
B. A. SUTTON  
1848

Office of..... County of.....  
 State of..... I hereby certify that the within instrument was filed in this office  
 for record on the..... day of....., 19.....  
 ..... by .....  
 (COUNTY OFFICIAL) (DEPUTY)

**UNION COUNTY  
SURVEYOR**

---

Date Received 7-2-84  
 Date Filed <sup>☆ GPO-798-276</sup> 7-3-84  
 By G. LANGLITZ DEPUTY  
 File No. 892-84 R

T3S33 1/2 R21

Remonumentation of Certain Original Corner Points,  
T. 3 S., R. 33 1/2 E., Willamette Meridian, Oregon

CHAINS

T 3 S R 33 1/2 E

~~S 26 | S 25  
1975~~
~~from which new bearing trees~~
~~A western larch, 12 ins. diam., bears N. 80 1/2° E.,  
50 lks. dist., mkd. 1/4 S25 BT.~~
~~A fir, 14 ins. diam., bears N. 25° W., 4 lks.  
dist., mkd. 1/4 S26 BT.~~
~~Deposit corner stone alongside iron post.~~

The cor. of secs. 23, 24, 25, and 26, monumented with a  
basalt stone, 18 x 18 x 12 ins., firmly set 6 ins. in  
the ground, no marks visible, from which the remains of  
the original bearing trees:

A fir snag, 28 ins. diam., bears S. 88° E., 181  
lks. dist., with scribe marks BT visible on  
partially healed blaze.

A root hole, bears N. 55° W., 40 lks. dist., with  
a down and decayed pine alongside, 36 ins. diam.,  
with scribe marks T3S R33 1/2 E S23 BT visible on  
decayed blaze.

At the corner point

Set an iron post, 28 ins. long, 2 1/2 ins. diam., 24 ins.  
in the ground, with brass cap mkd.

T 3 S R 33 1/2 E  
S 23 | S 24  
S 26 | S 25  
1975

from which new bearing trees

A fir, 6 ins. diam., bears N. 61° E., 24 lks.  
dist., mkd. T3S R33 1/2 E S24 BT.

A fir, 8 ins. diam., bears S. 80° E., 212 lks.  
dist., mkd. T3S R33 1/2 E S25 BT.

A fir, 17 ins. diam., bears S. 66° W., 47 lks.  
dist., mkd. T3S R33 1/2 E S26 BT.

A fir, 15 ins. diam., bears N. 55 1/2° W., 41 lks.  
dist., mkd. T3S R33 1/2 E S23 BT.

Deposit corner stone alongside iron post.

The cor. of secs. 26, 27, 34, and 35, monumented with a  
basalt stone, 18 x 12 x 8 ins. (record, 20 x 13 x 10 ins.)  
firmly set 10 ins. in the ground, no marks visible, from  
which the remains of the original bearing trees:

A sawed pine stump, 30 ins. diam., bears N. 82° E.,  
27 lks. dist., no marks visible.

UNION COUNTY  
SURVEYOR

Date Received 3/15/13

Date Filed 3/15/13

By [Signature] DEPUTY

File No. 370-2013R

T3S33 1/2 R21

T3S33 1/2 R17