


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

In 1882, under GLO Contract No. 451, Rufus S. Moore set a stone 20x13x10, from which a 36" Fir bears S22°W, 30 lks.; an 18" Juniper bears S70°E, 144 lks.; a 30" Pine bears N82°E, 27 lks.; and a 20" Pine bears N42°W, 47 lks.

Index File No. V-17

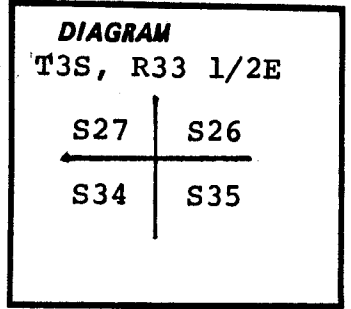


Description of corner evidence found:

Found 3 1/4" brass cap on 2 1/2" iron pipe rising 14" with original stone along south side, stamped:

Bearing Trees Found:

- A 23 1/2" P. Pine bearing N43°W, 32.6 ft., scribed "T3S R33 1/2E S27 BT"
- A 13 1/2" D. Fir bearing N59°E, 10.1 ft., scribing partially healed over.
- A 15" Juniper bearing S68°E, 93.6 ft., scribed "T3S R33 1/2E S35 BT".
- A 41" D. Fir bearing S25°W, 21.5 ft., blaze healed over.

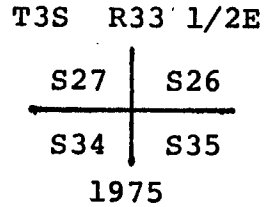

Description of monument and accessories established to perpetuate the original location of this corner:

New BT:

A 7" D. Fir bearing S45°E, 81.8 ft. scribed T3S R33 1/2E S35 BT.

Painted blazes and attached signs as per Standard Specifications for Cadastral Surveys, USFS Region 6, March, 1982.

Compass Declination: 19 1/2°E
Witness: G. Arrand

From 2115-135, follow 2115-136 northwesterly 1/4 mi. Corner is 40 ft. left of road. Juniper BT is visible from road.

I hereby certify the above described corner monument and/or accessories was established as described on May 30, 1984.

UNION COUNTY SURVEYOR
Date Received <u>7-2-84</u>
Date Filed <u>7-3-84</u>
By <u>G. LANGLITZ DEPUTY</u>
File No. <u>898-84R</u>

REGISTERED PROFESSIONAL LAND SURVEYOR
<i>B. A. Sutton</i>
OREGON JULY 13, 1979 B. A. SUTTON 1848

Office of..... County of.....
State of..... I hereby certify that the within instrument was filed in this office
for record on the..... day of....., 19.....
..... by
(COUNTY OFFICIAL) (DEPUTY)

Remonumentation of Certain Original Corner Points,
T. 3 S., R. 33 1/2 E., Willamette Meridian, Oregon

CHAINS

T 3 S R 33 1/2 E
1/2
S 26 | S 25
1975

from which new bearing trees

A western larch, 12 ins. diam., bears N. 80 1/2° E.,
50 lks. dist., mkd. 1/4 S25 BT.

A fir, 14 ins. diam., bears N. 25° W., 4 lks.
dist., mkd. 1/4 S26 BT.

Deposit corner stone alongside iron post.

The cor. of secs. 23, 24, 25, and 26, monumented with a
basalt stone, 18 x 18 x 12 ins., firmly set 6 ins. in
the ground, no marks visible, from which the remains of
the original bearing trees:

A fir snag, 28 ins. diam., bears S. 88° E., 181
lks. dist., with scribe marks BT visible on
partially healed blaze.

A root hole, bears N. 55° W., 40 lks. dist., with
a down and decayed pine alongside, 36 ins. diam.,
with scribe marks T3S R33 1/2 E S23 BT visible on
decayed blaze.

At the corner point

Set an iron post, 28 ins. long, 2 1/2 ins. diam., 24 ins.
in the ground, with brass cap mkd.

T 3 S R 33 1/2 E
S 23 | S 24
S 26 | S 25
1975

from which new bearing trees

A fir, 6 ins. diam., bears N. 61° E., 24 lks.
dist., mkd. T3S R33 1/2 E S24 BT.

A fir, 8 ins. diam., bears S. 80° E., 212 lks.
dist., mkd. T3S R33 1/2 E S25 BT.

A fir, 17 ins. diam., bears S. 66° W., 47 lks.
dist., mkd. T3S R33 1/2 E S26 BT.

A fir, 15 ins. diam., bears N. 55 1/2° W., 41 lks.
dist., mkd. T3S R33 1/2 E S23 BT.

Deposit corner stone alongside iron post.

The cor. of secs. 26, 27, 34, and 35, monumented with a
basalt stone, 18 x 12 x 8 ins. (record, 20 x 13 x 10 ins.)
firmly set 10 ins. in the ground, no marks visible, from
which the remains of the original bearing trees:

A sawed pine stump, 30 ins. diam., bears N. 82° E.,
27 lks. dist., no marks visible.

UNION COUNTY
SURVEYOR

Date Received 3/15/13

Date Filed 3/15/13

By [Signature] DEPUTY

File No. 373-2013E

Remonumentation of Certain Original Corner Points,
T. 3 S., R. 33½ E., Willamette Meridian, Oregon

CHAIR

A juniper, 18 ins. diam., bears S. 69° E., 142 lks. dist., with scribe marks T3S R33½E S35 BT visible on partially healed blaze. (Record, S. 70° E., 144 lks.)

A fir, 40 ins. diam., bears S. 22° W., 30 lks. dist., with illegible scribe marks visible on partially healed blaze.

A pine, 22 ins. diam., bears N. 42° W., 47 lks. dist., with scribe marks T3S R33½E S27 BT visible on partially healed blaze.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd.

T 3 S R 33½ E
S 27 S 26
S 34 S 35
1975

from which a new bearing tree

A fir, 14 ins. diam., bears N. 57° E., 14½ lks. dist., mkd. T3S R33½E S26 BT.

Deposit corner stone alongside iron post.

The ¼ sec. cor. of secs. 26 and 27, determined at record bearing and distance from which the remains of the original bearing trees:

A fir, 14 ins. diam., bears S. 8° E., 62 lks. dist., with scribe marks / 4 S visible on partially healed blaze.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 4 ins. in the ground, to solid rock, in a mound of stone, 5 ft. base, to top, with brass cap mkd.

T 3 S R 33½ E
¼
S 27 S 26
1975

from which a new bearing tree

A pine, 20 ins. diam., bears N. 2½° W., 69 lks. dist., mkd. ¼ S27 BT.

The cor. of secs. 22, 23, 26, and 27, determined at record distance from the remains of the original bearing trees:

A pine, 10 ins. diam., bears S. 36° E., 16 lks. dist., with scribe mark S visible on partially healed blaze.

A fir, 12 ins. diam., bears S. 31½° W., 27 lks. dist., with healed blaze. (Record, S. 30° W.)

UNION COUNTY
SURVEYOR

Date Received 3/15/13

Date Filed 3/15/13

By J. L. DEPLEY

File No. 373-2013R