


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

Index File No. Z-23

History of original corner establishment:

In 1882, under GLO Contract No. 451, Rufus S. Moore set a stone 15x15x10, from which an 18" Fir bears N15°W, 26 lks. and a 10" Pine bears S41°E, 29 lks.

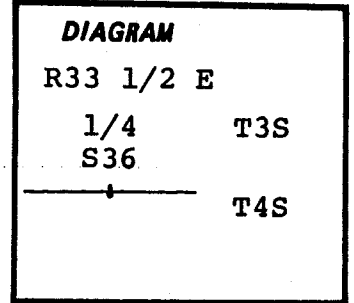

Description of corner evidence found:

Found original stone, no marks. Found no bearing trees.

Description of monument and accessories established to perpetuate the original location of this corner:

Set 2 1/2" x 30" aluminum capped aluminum pipe rising 6", stamped:
Set original stone in hole north of A.C.A.P.

New BT's:

- A 6.5" Juniper bears N58 1/4°W, 118.9 ft., scribed 1/4 S36 SC BT.
- A 6" P. Pine bears N37°E, 121.4 ft., scribed 1/4 S36 SC BT.

T3S R33 1/2E
 SC
 1/4
 S36
 —●—
 T4S
 1984
 RLS 1848

Painted blazes and attached signs as per Standard Specifications for Cadastral Surveys, USFS Region 6, March, 1982. Set metal fence post 4 ft. east of corner.

Compass Declination: 19 1/2°E
Witness: G. Arrand

From the intersection of 2110-710 & 2110-710, go northerly .6 mi to posted line. Follow posted line east 1650 ft. to corner.

I hereby certify the above described corner monument and/or accessories was established as described on May 16, 1984.

REGISTERED
 PROFESSIONAL
 LAND SURVEYOR

B. A. Sutton

OREGON
 JULY 13, 1979
 B. A. SUTTON
 1848

Office of..... County of.....

State of....., I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....

..... by
(COUNTY OFFICIAL) (DEPUTY)

**UNION COUNTY
SURVEYOR**

Date Received 7-2-84

Date Filed ^{★GPO-798-276} 7-3-84

By G. LANGLITZ DEPUTY

File No. 906-84R