

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


History of original corner establishment:

Original 1/4 Corner set by Rufus S. Moore, under Contract No. 451, dated June 12, 1882.

Surveyor General Record states:

Set basalt stone 15 x 8 x 6 for 1/4 Corner, Marked 1/4 on west face from which:

- A Pine 15" Diameter Bears South, 55 LKS
- A Pine 4" Diameter Bears N28E, 17 LKS

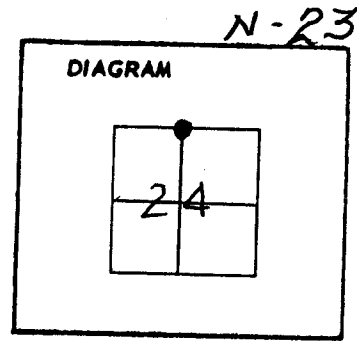

Description of corner evidence found:

Found 18" ± Pine dead - down - badly rotted - blaze evident, faint scribes visible.

Found stone 13 x 9 x 6 marked 1/4, loose, in Dry Creek bottom 7 ± ft. downstream from corner position as established from record bearing and distance from BT.

No evidence of other BT found.

(See map of Survey, dated July, 1979.)


Description of monument and accessories established to perpetuate the original location of this corner

At record bearing and distance from BT I set 2 1/2" x 30" iron pipe with brass cap marked as shown, 20" in ground, from which:

- A 12" Fir Bears S. 46 W., 45.7 ft. marked 1/4 S24 BT.
- A 22" Fir Bears N. 38 W., 62.6 ft. marked 1/4 S13 BT.

Buried stone alongside pipe.

Raised mound of stone.

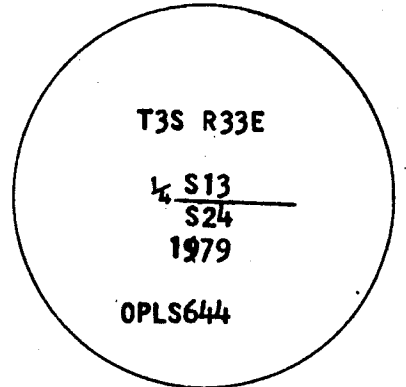

**REGISTERED  
PROFESSIONAL  
LAND SURVEYOR**

*Duane I. Griffith*

OREGON  
JULY 10, 1984  
**DUANE I. GRIFFITH**  
644

Nailed brass washer to BT. blazes, used steel tape and magnetic compass with 20° East declination. Measured to center of BTs.

Office of ..... County of .....  
 State of ..... , I hereby certify that the within instrument was filed in this office  
 for record on the ..... day of .....  
 ..... by .....  
 (COUNTY OFFICIAL) (DEPUTY)

**ION COUNTY  
SURVEYOR**

---

Date Received \_\_\_\_\_

Date Filed NOV 20 1984

By \_\_\_\_\_

File No. 346-84 R