


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

0-24

History of original corner establishment:

This 1/16 corner not previously established of record.

I established this 1/16 at the intersection of line from the opposite corresponding 1/16 corner of the Northeast 1/4 of Section 24.

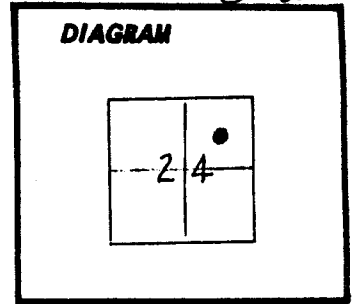

Description of corner evidence found:


None

(See map of Survey, dated July, 1979.)

Description of monument and accessories I established to perpetuate the original location of this corner:

At corner point I set 2 1/2" x 30" iron pipe with brass cap marked as shown, 27" in ground, from which:

- A 10" Spruce Bears S. 6 E., 162.5 ft. marked NE 1/16 S24 BT.
- A 8" Spruce Bears S. 57 W., 162.1 ft. marked X BT.

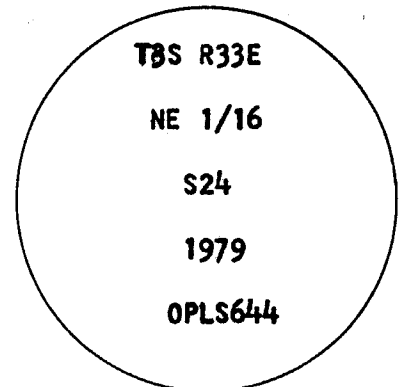

Nailed brass washer to BT. blazes, used steel tape and magnetic compass with 20° declination. Measured to center of BTs.

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Duane I. Griffith

OREGON
JULY 10, 1964
DUANE I. GRIFFITH
644

Office of..... County of.....

State of....., I hereby certify that the within instrument was filed in this office

for record on the..... day of....., 19.....

..... by
(COUNTY OFFICIAL) (DEPUTY)

UNION COUNTY SURVEYOR

Date Received 0-798-276

Date Filed _____

By _____

File No. 348-84 R