


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

This 1/16 corner not previously established of record.

I established this 1/16 corner at midpoint between the Northwest corner and the East 1/4 corner of Section 24.

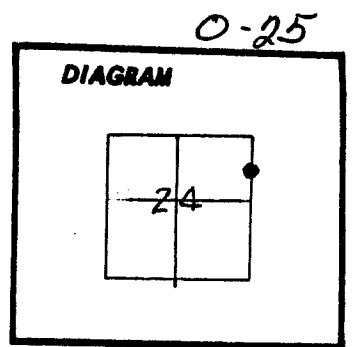

Description of corner evidence found:


None

(See map of Survey, dated July, 1979.)

Description of monument and accessories I established to perpetuate the original location of this corner:

At corner point I set 2 1/2" x 30" iron pipe with brass cap marked as shown, 28" in ground, from which:

- A 5" L.P. Pine Bears S. 87 W., 94.0 ft. marked N 1/16 S24 BT.
- A 5" L.P. Pine Bears N. 30 W., 19.5 ft. marked X BT.

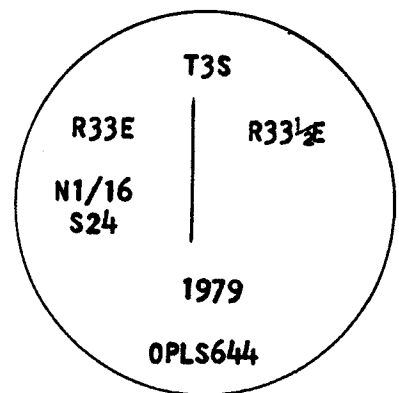

Nailed brass washer to BT. blazes, used steel tape and magnetic compass with 20° declination. Measured to center of BTs.

REGISTERED PROFESSIONAL LAND SURVEYOR

Duane I. Griffith

OREGON
JULY 10, 1984
DUANE I. GRIFFITH
644

Office of..... County of.....

State of....., I hereby certify that the within instrument was filed in this office

for record on the..... day of....., 19.....

(COUNTY OFFICIAL)

by

(DEPUTY)

Form R6-7100-57 (9/71)

UNION COUNTY SURVEYOR

Date Received _____
★ OPO-798-278

Date Filed _____

By _____

File No. 349-84R