

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


History of original corner establishment:

Original 1/4 corner set by Rufus S. Moore, under Contract No. 451, dated June 12, 1882.

Surveyor General Record states:

Set post for 1/4 corner from which:

- A Pine 4" diameter bears N70E, 23 LKS
- A Pine 7" diameter bears S54W, 46 LKS

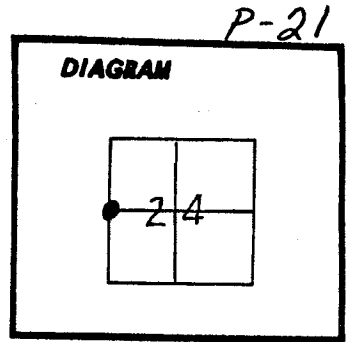

Description of corner evidence found:


None

(See map of Survey, dated July 1979)

Description of monument and accessories I established to perpetuate the original location of this corner:

At proportionate distance between the Northwest corner and the Southwest corner of Section 24 I set 2 1/2" x 30" iron pipe with brass cap marked as shown, from which:

- A 26" Tamarack Bears S. 47 E., 51.1 ft. marked 1/4 S24 BT.
- A 9" Tamarack Bears N. 88 W., 32.6 ft. marked 1/4 S23 BT.

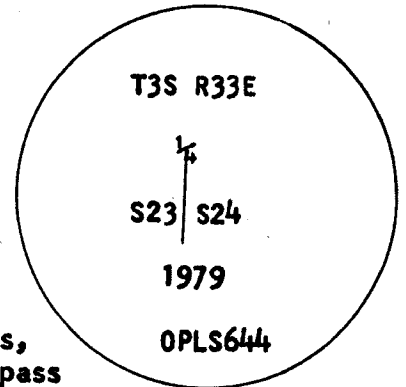

Nailed brass washer to BT. blazes, used steel tape and magnetic compass with 20° East declination. Measured to center of BTs.

REGISTERED PROFESSIONAL LAND SURVEYOR

*Duane I. Griffith*

OREGON  
JULY 10, 1984  
DUANE I. GRIFFITH  
644

Office of..... County of.....

State of....., I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....

(COUNTY OFFICIAL)

(DEPUTY)

**UNION COUNTY SURVEYOR**

Date Received \_\_\_\_\_

Date Filed \_\_\_\_\_

By \_\_\_\_\_

File No. 350-84R