


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

P-22

History of original corner establishment:

This 1/16 corner not previously established of record.

I established this 1/16 at midpoint between the West 1/4 corner and the center 1/4 corner of Section.

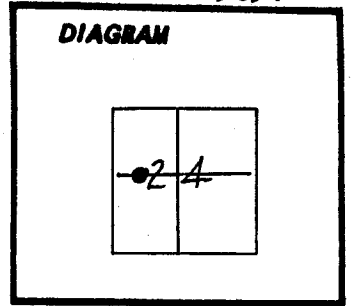

Description of corner evidence found:


None

(See map of Survey, dated July, 1979.)

Description of monument and accessories I established to perpetuate the original location of this corner:

At corner point I set 2 1/2" x 30" iron pipe with brass cap marked as shown, 28" in ground, from which:

- A 12" Tamarack Bears S. 49 W., 89.8 ft. marked CW 1/16 S 24 BT.
- A 13" Tamarack Bears N. 42 W., 77.7 ft. marked X BT.

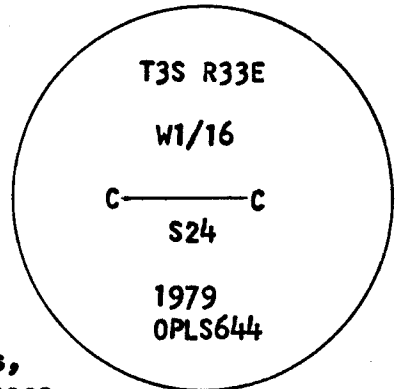

Nailed brass washer to BT. blazes, used steel tape and magnetic compass with 20° declination. Measured to center of BTs.

REGISTERED PROFESSIONAL LAND SURVEYOR

Duane I. Griffith

OREGON
JULY 10, 1984
DUANE I. GRIFFITH
644

Office of..... County of.....

State of....., I hereby certify that the within instrument was filed in this office

for record on the..... day of....., 19.....

..... by
(COUNTY OFFICIAL) (DEPUTY)

WAGON COUNTY SURVEYOR

Date Received GPC-798.276

Date Filed _____

By _____

File No. 351-84R