

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

P-25


History of original corner establishment:

Original 1/4 Corner set by Rufus S. Moore, under Contract No. 451, dated June 12, 1882.

Surveyor General Record states:

Set post 3 ft. long for 1/4 corner from which:

- A pine 10" diameter bears N63E, 13 LKS
- A pine 9" diameter bears S87W, 16 LKS

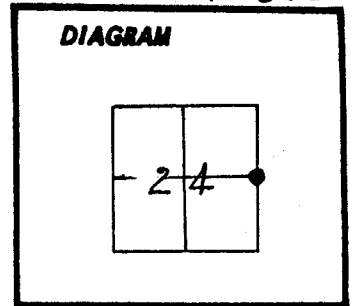

Description of corner evidence found:

None


(See map of Survey, dated July 1979.)

Description of monument and accessories established to perpetuate the original location of this corner:

At proportionate distance between the Northeast Corner and the Southeast corner of Section 24 I set 2 1/2" x 30" iron pipe with brass cap marked as shown, 26" in ground, from which:

- A 5" L.P. Pine Bears S. 43 W., 16.3 ft. marked X BT.
- A 6" L.P. Pine Bears N. 76 W., 37.0 ft. marked 1/4 S24 BT.

Raised mound of stone.

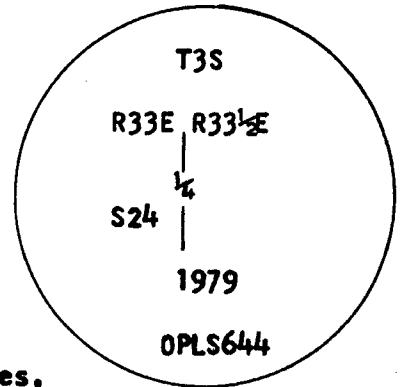

Nailed brass washer to BT. blazes, used steel tape and magnetic compass with 20° East declination. Measured to center of BTs.

REGISTERED PROFESSIONAL LAND SURVEYOR

Duane I. Griffith

OREGON
JULY 10, 1964
DUANE I. GRIFFITH
644

Office of..... County of.....

State of....., I hereby certify that the within instrument was filed in this office

for record on the..... day of....., 19.....

..... by
(COUNTY OFFICIAL) (DEPUTY)

UNION COUNTY SURVEYOR

Date Received _____

Date Filed _____

By _____

File No. 352-84 R