


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

Q-22

History of original corner establishment:

This 1/16 corner not previously established of record.

I established this 1/16 corner at the intersection of line from opposite corresponding 1/16 corner of the Southwest 1/4 of Section 24.

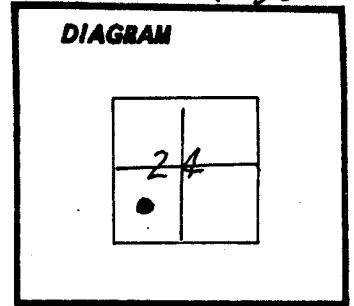

Description of corner evidence found:


None

(See map of Survey, dated July, 1979)

Description of monument and accessories I established to perpetuate the original location of this corner:

At corner point I set 2½" x 30" iron pipe with brass cap marked as shown, 27" in ground, from which:

- A 12" Fir Bears N. 34 E., 36.2 ft. marked SW 1/16 S24 BT.
- A 10" Tamarack Bears N. 70 E., 23.4 ft. marked SW 1/16 S24 BT.

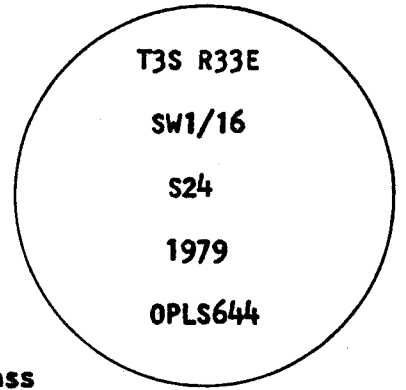

Nailed brass washer to BT. blazes, used steel tape and magnetic compass with 20° declination. Measured to center of BTs.

**REGISTERED  
PROFESSIONAL  
LAND SURVEYOR**

OREGON  
JULY 10, 1984  
**DUANE I. GRIFFITH**  
644

Office of..... County of.....

State of....., I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....

..... by .....  
(COUNTY OFFICIAL) (DEPUTY)

**UNION COUNTY  
SURVEYOR**

---

Date Received \_\_\_\_\_  
Date Filed \_\_\_\_\_  
By \_\_\_\_\_  
File No. 353-84R