


Township 3 South

Range 36 East W 116

Union County, Oregon.

Robert Young Lee Young Pleas Young & Wm. Dixon Dec 7th 1888

CHAINS. LKS.

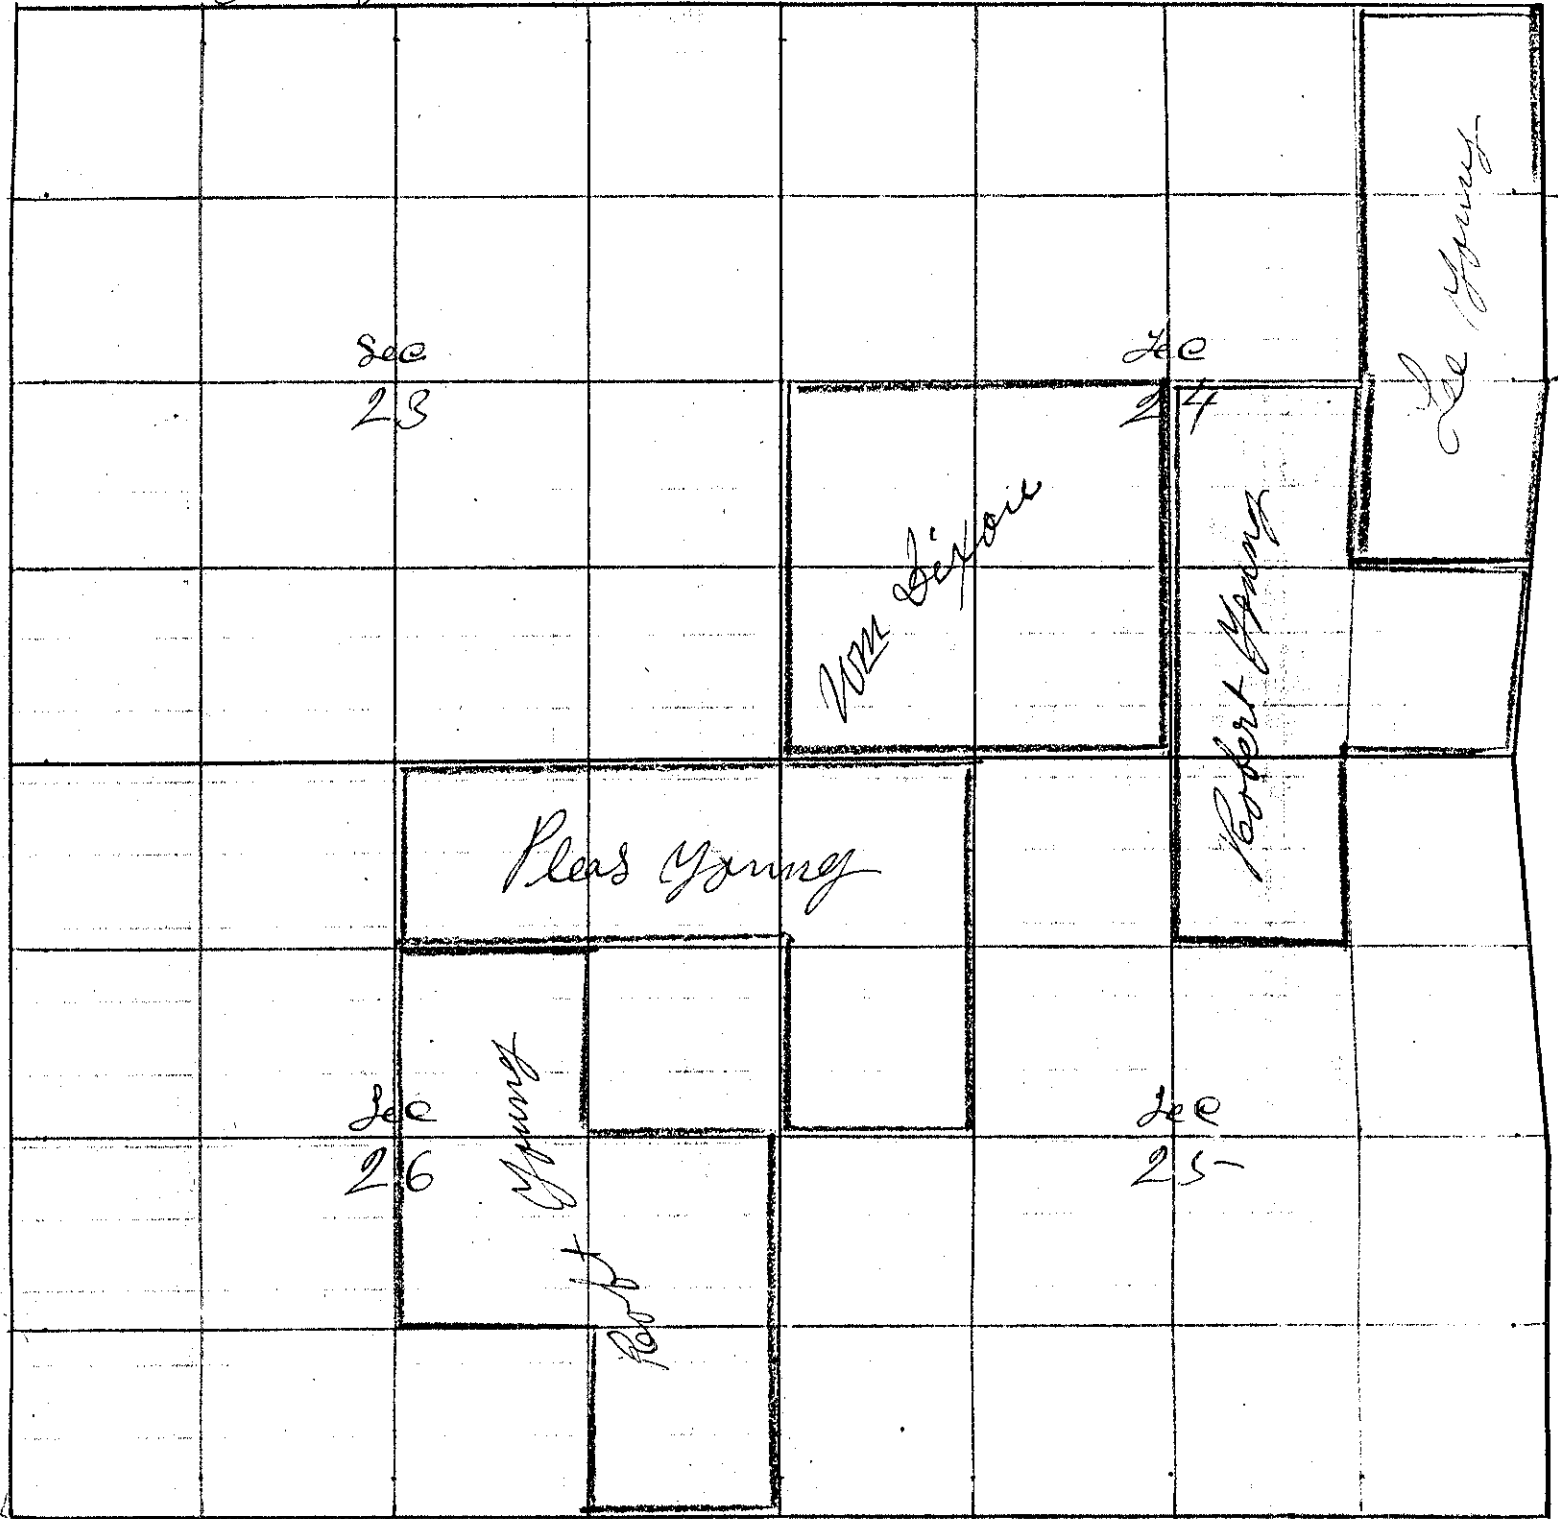

I Commenced at the 1/4 Sec corner bet Sec 26 & 35 -
 Hence North through Sec 26
 Var $79\frac{3}{4}^{\circ}$ E

- 4 00 Var $23^{\circ}45'$ E
- 7 00 Var. $22^{\circ}45'$ E
- 15 00 var $19^{\circ}45'$ E
- 20 00 Set Temporary 1/16 corner
- 27 00 var $19^{\circ}45'$ E
- 40 00 Set Temporary Center Sec 26
- 60 00 Set Temporary 1/16 corner
- 81 35 Intersect North Boundary at the 1/4 Sec Cor bet Sec 23 & 26

from which
 a Pine 14 inches dia. frs $N50^{\circ}W 39$ lks dist
 " 20 " " " " $S52^{\circ}W 50$ " "

The
 The 1/4 Sec corner bet Sec 26 & 27
 from which

a Sawrack 14 inches dia. frs $S9^{\circ}E 73$ lks dist.
 " 18 " " " " $S1^{\circ}W 46$ " "

Thence East through Sec 26

40 56 Intersect N 1/2 S line 12 lks North of first Temporary Center Stake

60 58 Set Temporary 1/16 corner

51 25 Intersect East Boundary Sec 26 - 41 lks South of the 1/4 Sec Corner bet Sec 25 & 26 from which

a Pine 28 inches dia. bcs S 65° W 91 lks dist.

" 7 " " " N 88° E 31 " "

The 1/4 Sec corner bet Sec 28 & 26

Thence South

20 22 Set Post for 1/16 corner in Center N 1/2 Sec 26

from which

a Pine 20 inches dia bcs N 35° E 81 lks dist.

" 20 " " " S 85° E 98 " "

40 44 Set Post for Center Sec 26

from which

a Pine 18 inches dia. bcs N 42° E 49 lks dist.

" 18 " " " S 40° W 8 " "

60 40 Set Post for 1/16 corner in Center S 1/2 Sec 26

from which

a Pine 24 inches dia. bcs N 29° E 18 lks dist.

" 10 " " " S 53° W 77 " "

The 1/4 Sec corner bet Sec 25 & 26

Thence West

20 33 Set Post for 1/16 corner in Center E 1/2 Sec 26

from which

a Pine 20 inches dia. bcs S 48° W 148 lks dist.

" 15 " " " N 57° E 152 " "

The 1/4 Sec corner bet Sec 25 & 26

Thence North bet Sec 25 & 25

40 80 The Corner to Sec 28 = 24 = 25 & 26 a Post in Mound of Stone

Thence South

20 40 Set Post for 1/8 corner in Mound of Stone

from which

a Pine 24 inches dia. bcs S 55° E 4 lks dist.

" 14 " " " N 1° W 23 " "

Thence West

40 61 The 1/16 corner in Center N 1/2 Sec 26

Thence East

Township 3 South

Range 36 East

Union County, Oregon.

CHAINS.

LKS.

- Hence East through $N 8^{\circ} 14'$ Sec 26
 20 31 Set Post for $1/16$ corner in cuts $N 8^{\circ} 14'$ Sec 26
 from which
 a Pine 10 inches diameter $S 46^{\circ} E 30$ lks dist.
 " 14 " " " " $N 42^{\circ} W 150$ " "
- The $1/4$ Sec corner bet Sec 25 & 26
 Hence East through Sec 25 -
 Var $20^{\circ} E$
- 40 00 Set Temporary $1/16$ corner
 40 50 Set Temporary center Sec 25 -
 60 00 Set Temporary $1/16$ corner
 79 91 Intersect East boundary 71 lks South of
 The $1/4$ Sec corner bet Sec 25 & 30
 from which
 a Pine 24 inches dia $N 40^{\circ} W 29$ lks
 " 20 " " " " $N 52^{\circ} E 53$ "
 Hence South $89^{\circ} 35' W$ on true line
 through Sec 25 -
- The $1/4$ Sec corner bet Sec 25 & 30
 Hence North bet Sec 25 & 30
 Var $20^{\circ} E$
- 40 72 Intersect 75 lks East of corner to Sec 24 = 25 = 19 & 30
 from which
 a Pine 34 inches dia, $S 74^{\circ} W 68$ lks dist.
 " 32 " " " " $S 12^{\circ} E 106$ " "
 " 33 " " " " $N 41^{\circ} W 29$ " "
 " 32 " " " " $N 5^{\circ} E 80$ " "
 Hence West bet Sec 24 & 25 -
 Var $24^{\circ} E$
- 20 50 Set Temporary $1/8$ corner
 39 26 The $1/4$ Sec corner bet Sec 24 & 25 -
 from which
 a Pine 28 inches dia, $S 83^{\circ} W 276$ lks dist.
 " 34 " " " " $N 73^{\circ} W 289$ " "
 Hence East
- 19 63 Set Post for $1/8$ corner
 39 26 The corner to Sec 24 = 25 = 19 & 30

- 37 80 The 1/4 Sec corner bet Sec 24 & 25 -
 Thence west
- 19 90 Set Post for 1/8 cor
- 59 80 The 1/4 Sec corner bet Sec 24 & 25 -
 Thence South through Sec 25 -
 On 20° E
- 20 00 Set Temporary 1/16 corner
- 40 67 Intersect E & W line 3 lks west of first Cate Stake
- 81 57 Intersect 10 lks west of 1/4 Sec corner bet Sec 25 & 36
 from which
 a Pine 15 inches dia. brs N 58° W 67 lks dist.
 " 22 " " " S 36° E 26 " "
- Thence North
- 40 90 Set Post in mound of Stone for Cate Sec 25 -
- 61 13 Set Post in Mound of Stone for 1/16 corner in Center N 1/4 Sec 25 -
- 81 57 The 1/4 Sec corner bet Sec 24 & 25 -
- The 1/8 corner on North Boundary N E 1/4 Sec 25 -
 Thence South
- 20 35 Set Post for 1/16 corner in Center N E 1/4 Sec 25 -
- The Center Sec 25 -
 Thence west
- 20 04 Set Post in Mound of Stone for 1/16 corner in Center W 1/4 Sec 25 -
- 40 08 The 1/4 Sec corner bet Sec 25 & 26
 The 1/4 Sec corner bet Sec 24 & 25 -
 Thence North through Sec 24
 The 1/4 Sec corner bet Sec 24 & 25 - On 21° E
- 20 00 Set Temporary 1/16 corner
- 40 00 Set Temporary Center Sec 24.
- 82 70 Intersect 160 lks west of the 1/4 Sec corner bet Sec 13 & 24
 from which
 a Pine 12 inches dia. brs N 33° W 23 lks dist.
 " 24 " " " S 19° E 98 " "
 Thence S 1° 9' W on true line through Sec 24
- The 1/4 Sec corner bet Sec 23 & 24
 from which
 a Pine 26 inches dia brs S 47° E 222 lks dist.

CHAINS.	LINKS.	
		Thence East through Sec 24 var 20° E
20	00	Set Temporary 1/16 corner
40	37	Intersect - N & S line 84 lks North of first Stake at Cate
81	08	Intersect East Boundary 464 lks South of the 1/4 Sec corner bet Sec 19 & 24
		from which a Pine 14 inches dia. brs N 73° E 88 lks dist " 18 " " " West 36 " "
20	39	Thence S 88° 20' W on same line Set Post for 1/16 corner in Cate E 1/2 Sec 24
		from which a Pine 34 inches dia. brs N 43° E 153 lks dist.
40	78	Set Post for Cate Sec 24
		from which a Pine 6 inch dia. brs S 37° W 23 lks dist. " 4 " " " N 67° W 31 " " " 10 " " " N 75° E 80 " "
60	94	Set Post for 1/16 corner in Cate W 1/2 Sec 24
		from which a Pine 14 inches dia. brs N 59° E 79 lks dist " 13 " " " S 79° W 125 " "
81	08	The 1/4 Sec corner bet Sec 23 & 24
		The Cate Sec 24 Thence South
21	53	Set Post for 1/16 corner in Cate S 1/2 Sec 24
		The 1/4 Sec corner bet Sec 13 & 24 Thence East bet Sec 13 & 24
40	62	The Corner to Sec 18 = 19 = 13 & 24
		Thence West -
20	31	Set Post in (monad of Stone) for 1/8 corner
		The 1/4 Sec corner bet Sec 19 & 24 Thence South bet Sec 19 & 24 var 20° E
43	83	Intersect - 300 lks East of the Corner Sec 19 = 30 = 24 & 25 -
		Thence N 4° 18' E on same line
21	96	Set Post for 1/8 corner

CHAINS. LRS.

from which
 a Pine 20 inches dia. bcs N 56° W 44 lks dist
 for 20 " " " " S 48° W 51 " "
 The 1/4 sec corner bet Sec 19 & 24
 Thence North bet Sec 19 & 24
 for 20° E

20 50 Set temporary 1/8 corner
 37 11 The corner to Sec 18 = 19 = 13 & 24
 " " Set Post for Thence South

19 55 Set Post for 1/8 corner from
 from which
 a Pine 6 inches dia. bcs N 88° E 212 lks dist
 " 14 " " " " S 87° W 168 " "
 39 11 The 1/4 sec corner bet Sec 19 & 24

The 1/8 corner on East Boundary S E 1/4 Sec 24
 Thence West

20 50 Set Post for 1/16 corner in center S E 1/4 Sec 24
 from which

a Pine 14 inches dia. bcs N 62° W 186 lks
 " 12 " " " " S 54° E 81 "
 40 00 The 1/16 corner in center S 1/2 Sec 24

The corner to Sec 18 = 19 = 13 & 24

Thence East bet Sec 18 & 19 for 20° E

40 65 Intersect 66 lks South of the 1/4 sec corner bet Sec 18 & 19
 Thence S 89° 3' W on true line

20 32 1/2 Set Post for 1/8 corner

The 1/4 sec corner bet Sec 18 & 19

Thence South through Sec 19 for 20° E

20 50 Set temporary 1/16 corner

40 50 Set temporary center Sec 19

83 40 Intersect 587 lks East of the 1/4 sec corner bet Sec 19 & 30
 Thence North 4° 12' E

83 40 The 1/4 sec corner bet Sec 18 & 19

The 1/4 sec corner bet Sec 19 & 24

Thence East through Sec 19 for 21° E

39 79 Intersect N & S line Thence West

19 88 Set Post for 1/16 corner in center W 1/2 Sec 19 Thence North

19 85 Set Post for 1/16 corner in center N W 1/4 Sec 19