


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

This 1/16 corner not previously established of record.

I established this 1/16 corner at midpoint between the Northwest corner and the East 1/4 corner of Section 24.

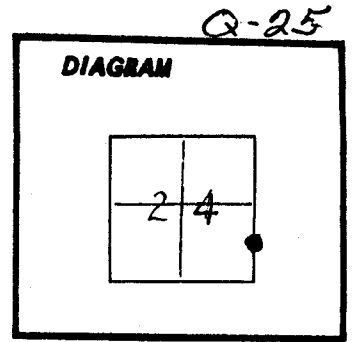

Description of corner evidence found:


None

(See map of Survey, dated July, 1979.)

Description of monument and accessories I established to perpetuate the original location of this corner:

At corner point I set 2 1/2" x 30" iron pipe with brass cap marked as shown, 28" in ground, from which:

- A 8" Tamarack Bears S. 8 W., 54.2 ft. marked S 1/16 S24 BT.
- A 5" L.P. Pine Bears S. 74 W., 43.5 ft. marked S 1/16 S24 BT.

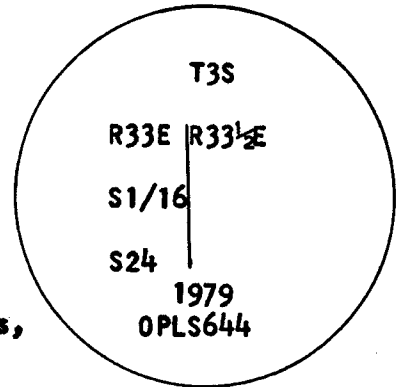

Nailed brass washer to BT. blazes, used steel tape and magnetic compass with 20° declination. Measured to center of BTs.

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*Duane I. Griffith*

OREGON  
JULY 10, 1984  
DUANE I. GRIFFITH  
644

Office of..... County of.....

State of....., I hereby certify that the within instrument was filed in this office

for record on the..... day of....., 19.....

..... by .....  
(COUNTY OFFICIAL) (DEPUTY)

**UNION COUNTY  
SURVEYOR**

---

Date Received 7-20-79

Date Filed \_\_\_\_\_

By \_\_\_\_\_

File No. 355-84R