


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

In 1882, under GLO Contract No 451, Rufus S. Moore set stone 16x17x6. A 4" Pine bears N18°W, 21 lks. A 5" Pine bears S31°E, 37 lks.

Index File No. V-19

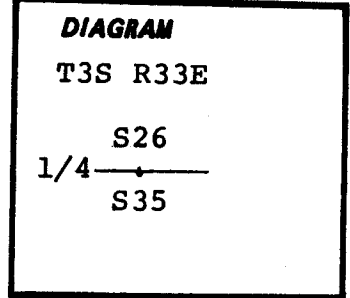

Description of corner evidence found:

Found stone the right size for original, but with no marks.

Bearing trees found:


A 9" Dead L. Pine bears N18°W, 17.1 ft., scribing visible "BT"

Description of monument and accessories established to perpetuate the original location of this corner:

Set 2 1/2"x30" aluminum capped aluminum pipe rising 6", stamped: Placed original stone on north side in mound.

New BT's:

A 7 1/2" D. Fir bears S2°W, 62.8 ft., scribed 1/4 S35 BT.
A 5 1/2" D. Fir bears N58 1/4°E, 36.5 ft., scribed 1/4 S26 BT.



The dead 9 1/2" original L. Pine was in a bad lean toward the southeast. I cut the tree off above the blaze at a 45° angle and nailed the attention sign over the cut.

Painted blazes and attached signs as per Standard Specifications for Cadastral Surveys, USFS Region 6, March, 1982. Set metal fence post 4 ft. north of corner.

Compass Declination: 19 1/2°E

Witness: D. Scott

From 2110-220, northwesterly on 2110-256 .75 mi. to where road curves to NE. Corner is 20 ft. left of road.

I hereby certify the above described corner monument and/or accessories was established as described on November 17, 1983.



Office of..... County of.....
State of....., I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....

..... by
(COUNTY OFFICIAL) (DEPUTY)

UNION COUNTY SURVEYOR
Date Received <u>7-2-84</u> <small>☆ GPO-750-276</small>
Date Filed <u>7-3-84</u>
By <u>G. LANGLITZ, DEPUTY</u>
File No. <u>875-84 R</u>