


CHAINS. LKS.

San. More Steve Pindle & Gaylord and Eng Morgan May 31st 1889

I Commenced at the 1/4 Sec Corner
bet Sec 28 & 26

from which
a Pine 13 inch dia. brs N 57° E 44 lks
" 11 " " " S 67° E 68 "
Thence North through Sec 28
Cor 20° E

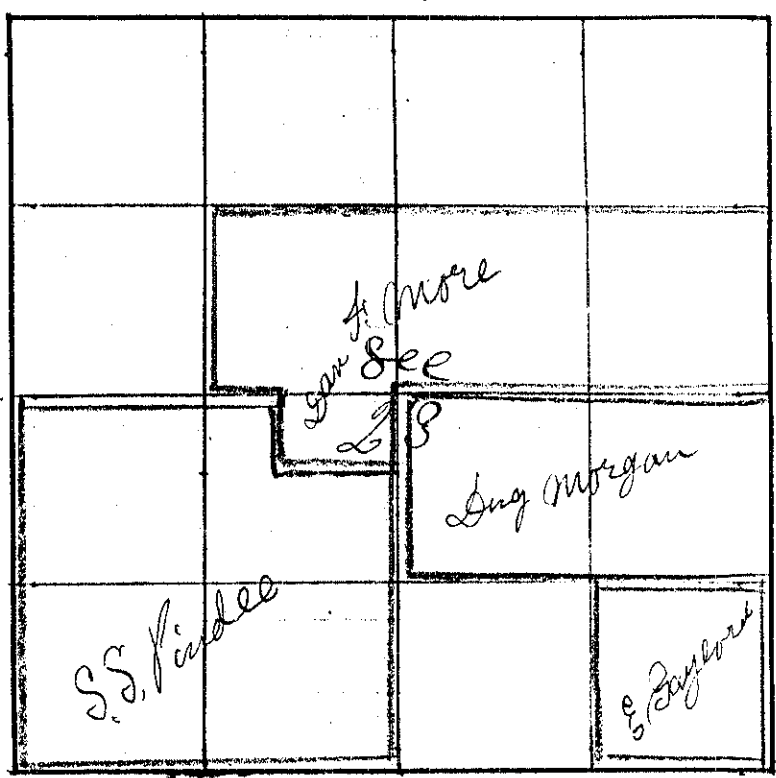

9 72 Pine Creek 229 lks across
Course South East-

20 00 Let Temporary 1/6 corner

40 00 Let Temporary center Sec 28

55 00 Top of Ridge course S 20° E N 20° W

81 43 Intersect 102 lks East of 1/4 Sec Corner bet Sec 14 & 28

from which
a Pine 18 inch dia. brs S 78 1/2° E 79 lks dist-
" 18 " " " N 88° W 175 " "
Thence S 44° E on true line
through center Sec 28 Cor 20° E

The 1/4 Sec Corner bet Sec 28 & 24

from which
a Pine 5 1/2 inch dia brs S 88° E 90 lks dist.
" 40 " " " N 66° W 165 " "
Thence West through Sec 28
Cor 19° E

20 00 Let Temporary 1/6 corner

38 50 Intersect true N 48 line 108 lks North of first Stake for center

55 00 Pine creek course S E

56 85 " " " " S E

58 50 " " " " S E

80 50 Intersect 365 lks South of the 1/4 Sec corner bet Sec 22 & 28
from which

a Pine 10 inch dia. brs N 12° W 128 lks dist-
" 18 " " " " N 65° E 26 " "
Thence S 88° 23' E on true line through center

42 00 Let Red fir Post 4 inches square 3 ft 9 in long for center Sec 28
from which

a Pine 24 inches dia brs S 73 1/2° E 155 lks dist-
" 24 " " " " N 38° E 227 " "