


**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

Index File No. <sup>A</sup>~~X~~-23

**History of original corner establishment:**

Corner was originally established by Rufus S. Moore, under GLO contract No. 451, during November, 1881. Surveyor General's notes state: "Set a basalt stone 18 X 12 X 6 ins., 12 ins. in the ground for 1/4 sec. cor., marked 1/4 on N. face. From which: A pine 16 ins. in diam. bears N28°W, 39 lks. dist. marked 1/4S BT. A pine 16 ins. in diam. bears S06°E, 72 lks. dist. marked 1/4S BT,"

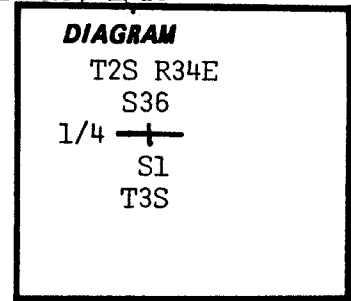


**Description of corner evidence found:**

Corner falls in center of an old road and no trace of record stone could be found. Found 30" pine, partially opened blaze, "4S" visible. Measured S28°E, 25.7 ft. and found 45" pine with grown over blazes that bears S06°E, 47.8 ft.

**Description of monument and accessories I established to perpetuate the original location of this corner:**

At the above point set 2 1/2" X 30" galvanized pipe and brass cap marked: Set pipe 12" in the ground to bedrock and mound of stone around to cap, Placed 54-3s and 54-4s on the BTs. Painted 6" red band around. Placed 54-2 and 54-4 on a steel fence post 5' west of the corner.

T2S R34E  
S36  
1/4   
S1  
T3S  
OR PLS 1051  
1980

I hereby certify that the above corner monument was reestablished as herein described.

Witnesses: Daniel Rowland  
Doug Moser

October 20, 1980

**REGISTERED  
PROFESSIONAL  
LAND SURVEYOR**

*Barry B. Bardour*

OREGON  
OCT. 17, 1975  
BARRY B. BARDOUR  
1051

Office of.....County Surveyor..... County of...Union.....

State of.....Oregon..... I hereby certify that the within instrument was filed in this office  
for record on the..30th day of...January....., 1981.

..... by .....  
(COUNTY OFFICIAL) (DEPUTY)

**UNION COUNTY  
SURVEYOR**  
Date Received \_\_\_\_\_  
★ GPO-798-276  
Date Filed \_\_\_\_\_  
By \_\_\_\_\_  
File No. 373-84 R