


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

Index File No. N-25 ¹

History of original corner establishment:

In 1882, under GLO Contract 451, Rufus S. Moore set a stone 20x13x12, from which a 10" Pine bears N59°W, 53 lks.; an 8" Pine bears N19°E, 210 lks.; a 10" Pine bears S18°E, 150 lks.; and a 10" Pine bears S9°W, 206 lks.

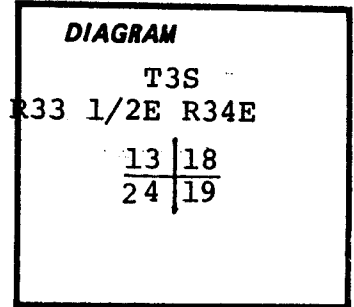

Description of corner evidence found:

Found BLM 3 1/4" brass cap on 2 1/2" iron pipe rising 20" in mound.
Cap stamped:

Bearing trees found:

T3S
R33 1/2E R34E

- A 10" L. Pine bears N66 3/4°W, 22.4 ft.,
dead standing, scribing visible "T3S R33 1/2E S13 BT". S13 | S18
S24 | S19
- Original BT dead & down N59°W, 41.9 ft.
- A 9" L. Pine bears N2 3/4°E, 68.9 ft.,
dead standing, scribing visible "T3S R34E S18 BT". 1975
- A 12 1/2" L. Pine bears S27°E, 106.7 ft.,
dead standing, scribing visible " T3S R34E S19 BT".

Description of monument and accessories | established to perpetuate the original location of this corner:

New BT's:

- A 4" L. Pine bears N23 3/4°W, 36.3 ft., scribed "X" BT
- A 6" P. Pine bears N15 1/2°E, 138.7 ft., scribed T3S R34E S18 BT.
- A 5 1/2" P. Pine bears S25 1/2°E, 44.6 ft., scribed T3SR34E S19 BT.
- A 6" P. Pine bears S51 1/2°W, 146.9 ft., scribed T3S R33 1/2E S24 BT.

Painted blazes and attached signs as per Standard Specifications for Cadastral Surveys, USFS Region 6, March 1982. Set metal fence post 4 ft. north of corner.

Declination: 19 1/2°E
Witness: G. Arrand

From 21, at the east side of the bridge at meadow creek, follow an old wagon road (2100-150) northerly & westerly for approx. 3/4 mi. Road comes to a sloping clearing on the right. The SW BT is 30 ft. above the road to the east. Corner is in clearing 150 ft. from BT.

REGISTERED PROFESSIONAL LAND SURVEYOR
<i>B. A. Sutton</i>
OREGON JULY 13, 1979 B. A. SUTTON 1848

I hereby certify the above described corner monument and/or accessories was established as described on June 21, 1984.

Office of..... County of.....

State of..... I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....

..... by
(COUNTY OFFICIAL) (DEPUTY)

UNION COUNTY SURVEYOR
Date Received <u>7-2-84</u>
Date Filed ^{☆ GPO-798-276} <u>7-3-84</u>
By <u>G. LANGLITZ, DEPUTY</u>
File No. <u>888-84 R</u>

Remonumentation of Certain Original Corner Points,
T. 3 S., R. 33½ E., Willamette Meridian, Oregon

CHAINS

Deposit corner stone alongside iron post.

The ¼ sec. cor. of secs. 19 and 24, determined at record bearing and distance from the remains of the original bearing trees:

A pine, 8 ins. diam., bears S. 50° W., 9 lks. dist., with scribe marks ¼ S BT visible on partially healed blaze.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mks

T 3 S
R 33½ E | R 34 E
S 24 | S 19
1975

from which a new bearing tree

A fir, 15 ins. diam., bears S. 67° E., 86 lks. dist., mkd. ¼ S19 BT.

The cor. of secs. 13, 18, 19, and 24, determined at record bearing and distance from the remains of the original bearing trees:

A decayed pine stump, 12 ins. diam., bears N. 19° E., 210 lks. dist., with scribe marks T3S R34E S18 visible on open blaze.

A root hole, bears N. 59° W., 53 lks. dist., with a down and decayed pine alongside, 12 ins. diam., with scribe marks T3S R33½E S13 visible on open blaze.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 10 ins. in the ground, to solid rock, in a mound of stone, 4½ ft. base, to top, with brass cap mkd.

T 3 S
R 33½ E | R 34 E
S 13 | S 18
S 24 | S 19
1975

from which new bearing trees

A pine, 10 ins. diam., bears N. 1½° E., 105 lks. dist., mkd. T3S R34E S18 BT.

A pine, 12 ins. diam., bears S. 28° E., 162 lks. dist., mkd. T3S R34E S19 BT.

A pine, 8 ins. diam., bears S. 84° W., 79 lks. dist., mkd. T3S R33½E S24 BT.

A pine, 10 ins. diam., bears N. 67½° W., 34 lks. dist., mkd. T3S R33½E S13 BT.

UNION COUNTY
SURVEYOR

Date Received 3/15/13Date Filed 3/15/13By MAR L DEPUTYFile No. 375-2013R