


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

In 1882, under GLO Contract 451, Rufus S. Moore set a stone 16x9x7, from which an 8" Pine bears N28°W, 125 lks.; a 30" Pine bears N66°E, 57 lks., a 24" Pine bears S4°E, 213 lks.; and a 12" Pine bears S46°W, 200 lks.

Index File No. R-25

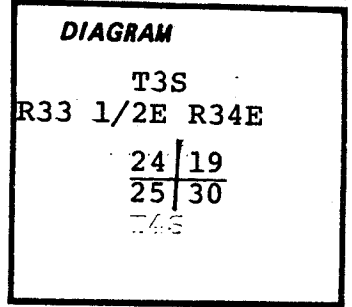

Description of corner evidence found:

Found BLM 3 1/4" brass cap on 2 1/2" iron pipe rising 12" in mound, stamped:

T3S  
R33 1/2E R34E

Bearing trees found:

- A 13.5" L. Pine bears N74 1/2°W, 62.8 ft., dead standing, scribing visible "T3S R33 1/2E S24BT"
- A 30.5" P. Pine bears N66°E, 40.7 ft., blaze healed.
- A 31.5" P. Pine bears S4°E, 139.1 ft., scribing visible "S30 BT".
- An 8.5" L. Pine bears S63°W, 69.7 ft., scribing visible "T3S R33 1/2E S25 BT".

S24 | S19  
S25 | S30  
1975

Description of monument and accessories established to perpetuate the original location of this corner:

New BT:

- A 5.5" Fir bears N76°W, 56.6 ft., scribed T3S R33 1/2E S24 BT.

Painted blazes and attached signs as per Standard Specifications for Cadastral Surveys, USFS Region 6, March 1982. Set metal fence post 4 ft. north of corner.

Compass Declination: 19 1/2°E

Witness: D. Scott

From 21, take 2100-117 westerly & northerly .2 mi. Corner is 300 ft. west down the hill in the middle of the clearing.

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*B. A. Sutton*

OREGON  
JULY 13, 1979  
B. A. SUTTON  
1848

I hereby certify the above described corner monument and/or accessories was established as described on May 30, 1984.

Office of..... County of.....

State of..... I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....

..... by .....  
(COUNTY OFFICIAL) (DEPUTY)

**UNION COUNTY  
SURVEYOR**

Date Received 7-2-84

Date Filed 7-3-84

By G. LANGLITZ DEPUTY

File No. 893-84R

Remonumentation of Certain Original Corner Points,  
T. 3 S., R. 33½ E., Willamette Meridian, Oregon

CHAINS

The ¼ sec. cor. of secs. 25 and 30, monumented with a basalt stone, 16 x 12 x 4 ins., firmly set 12 ins. in the ground, mkd. ¼ on W. face, from which the original bearing trees:

A fir, 19 ins. diam., bears N. 74° E., 22 lks. dist., with illegible scribe marks visible on opened blaze.

A pine, 21 ins. diam., bears West, 10 lks. dist., with healed blaze.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 3 S  
¼  
R 33½ E | R 34 E  
S 25 | S 30  
1975

Deposit corner stone alongside iron post.

The cor. of secs. 19, 24, 25, and 30, monumented with a basalt stone, 16 x 9 x 7 ins., firmly set 4 ins. in the ground, mkd. with 4 notches on N. and 2 notches on S. edge, from which the remains of the original bearing trees:

A pine, 35 ins. diam., bears N. 66° E., 57 lks. dist., with illegible scribe marks visible on partially healed blaze.

A pine, 30 ins. diam., bears S. 4° E., 209 lks. dist., with scribe marks 3S R3 S30 BT visible on opened blaze. (Record, 213 lks.)

A root hole, bears S. 46° W., 200 lks. dist., with a down and decayed pine alongside, 12 ins. diam., with scribe marks T3S R33½E S24 BT visible.

A pine, 12 ins. diam., bears N. 26¾° W., 121 lks. dist., with scribe marks ½ visible on partially opened blaze. (Record, N. 28° W., 123 lks.)

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 18 ins. in the ground, to solid rock, in a mound of stone, 4 ft. base, to top, with brass cap mkd.

T 3 S  
R 33½ E | R 34 E  
S 24 | S 19  
S 25 | S 30  
1975

from which new bearing trees

A pine, 7 ins. diam., bears S. 63° W., 106 lks. dist., mkd. T3S R33½E S25 BT.

A pine, 12 ins. diam., bears N. 74½° W., 96 lks. dist., mkd. T3S R33½E S24 BT.

**UNION COUNTY  
SURVEYOR**

Date Received 3/15/13

Date Filed 3/15/13

By [Signature] Deputy

File No. 377-2013R