


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

Index File No. T-25 <sup>1</sup>

History of original corner establishment:

In 1882, under GLO Contract Nō. 451, Rufus S. Moore set a stone 16x12x4, from which an 18" Fir bears West, 10 lks. and an 18" Fir bears N74°E, 22 lks.

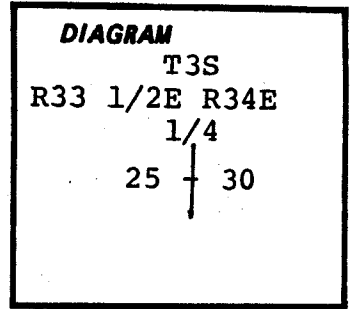


Description of corner evidence found:

Found BLM 3 1/4" brass cap on 2 1/2" iron pipe, stamped: Rising 8".

Bearing trees found:

- A 21.3" D. Fir bears N74°E, 15.3 ft. (14.5 ft.- BLM record) remnants of scribing visible.
- A 21.5" P. Pine bears west, 6.6 ft., blaze healed.



Description of monument and accessories | established to perpetuate the original location of this corner:

Painted blazes and attached signs as per Standard Specifications for Cadastral Surveys, USFS Region 6, March 1982. Set metal fence post 4 ft. north of corner.

Compass Declination: 19 1/2°E  
Witness: N. Petz.

From intersection of 21 & 2100-112, go north around the corner 200 ft. to a culvert in the draw. BT's are visible SE up to the top of the hill 150 ft.

I hereby certify the above described corner monument and/or accessories was established as described on September 15, 1984.

<b>UNION COUNTY SURVEYOR</b>
Date Received <u>7-2-84</u>
Date Filed <u>7-3-84</u>
By <u>G. LANGRIZ, DEPUTY</u>
File No. <u>896-84R</u>

REGISTERED PROFESSIONAL LAND SURVEYOR
<i>B. A. Sutton</i>
OREGON JULY 13, 1979 B. A. SUTTON 1848

Office of..... County of.....  
 State of....., I hereby certify that the within instrument was filed in this office  
 for record on the..... day of....., 19....  
 ..... by .....  
 (COUNTY OFFICIAL) (DEPUTY)

Remonumentation of Certain Original Corner Points,  
T. 3 S., R. 33½ E., Willamette Meridian, Oregon

CHAINS

The ¼ sec. cor. of secs. 25 and 30, monumented with a basalt stone, 16 x 12 x 4 ins., firmly set 12 ins. in the ground, mkd. ¼ on W. face, from which the original bearing trees:

A fir, 19 ins. diam., bears N. 74° E., 22 lks. dist., with illegible scribe marks visible on opened blaze.

A pine, 21 ins. diam., bears West, 10 lks. dist., with healed blaze.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 3 S  
¼  
R 33½ E | R 34 E  
S 25 | S 30  
1975

Deposit corner stone alongside iron post.

The cor. of secs. 19, 24, 25, and 30, monumented with a basalt stone, 16 x 9 x 7 ins., firmly set 4 ins. in the ground, mkd. with 4 notches on N. and 2 notches on S. edge, from which the remains of the original bearing trees:

A pine, 35 ins. diam., bears N. 66° E., 57 lks. dist., with illegible scribe marks visible on partially healed blaze.

A pine, 30 ins. diam., bears S. 4° E., 209 lks. dist., with scribe marks 3S R3 S30 BT visible on opened blaze. (Record, 213 lks.)

A root hole, bears S. 46° W., 200 lks. dist., with a down and decayed pine alongside, 12 ins. diam., with scribe marks T3S R33½E S24 BT visible.

A pine, 12 ins. diam., bears N. 26¾° W., 121 lks. dist., with scribe marks ½ visible on partially opened blaze. (Record, N. 28° W., 123 lks.)

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 18 ins. in the ground, to solid rock, in a mound of stone, 4 ft. base, to top, with brass cap mkd.

T 3 S  
R 33½ E | R 34 E  
S 24 | S 19  
S 25 | S 30  
1975

from which new bearing trees

A pine, 7 ins. diam., bears S. 63° W., 106 lks. dist., mkd. T3S R33½E S25 BT.

A pine, 12 ins. diam., bears N. 74½° W., 96 lks. dist., mkd. T3S R33½E S24 BT.

T3534T01

T3534T01

**UNION COUNTY  
SURVEYOR**

Date Received 3/15/13

Date Filed 3/15/13

By [Signature] DEPUTY

File No. 378-201312