


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

Index File No. V-09

History of original corner establishment:

In 1882, under GLO Contract No. 451, Rufus S. Moore set a stone 12x9x8, from which a 34" Pine bears S45°W, 220 lks.

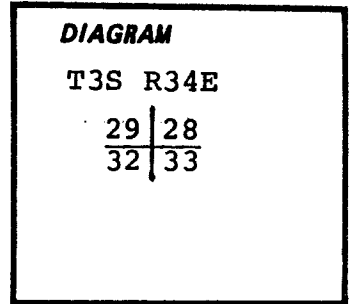

Description of corner evidence found:

Found original stone with notches.

Found a 28" P. Pine bearing S45°W, 146.0 ft., scribing visible "34E S32 BT".

Description of monument and accessories | established to perpetuate the original location of this corner:

Set 2 1/2"x30" aluminum capped aluminum pipe rising 18" in mound, with original stone along north side in mound. Cap stamped:

New BT's:

A 9" P. Pine bears N87°W, 118.2 ft., scribed T3S R34E S27 BT.

An 8" P. Pine bears N74 3/4°E, 373.8 ft., scribed T3S R34E S28 BT.

A 4 1/2" P. Pine bears S89 1/2°E, 429.1 ft., scribed "X" BT.

T3S R34E

| | |
|-----|-----|
| S29 | S28 |
| S32 | S33 |

RLS 1848
1984

Painted blazes and attached signs as per Standard Specifications for Cadastral Surveys, USFS Region 6, March 1982. Set metal post 5 ft. north.

Compass Declination: 19 1/2°E

Witness: M. Sutton

From 2120, take 2120-025 west 1/8 mi. Turn south on 2120-075 1 3/4 mi. to the end of the road. NE BT is visible 75 ft. past the end of the road. Corner is down the hill 60 ft. south of an east-west fence.

I hereby certify the above described corner monument and/or accessories was established as described on June 11, 1984.

| |
|--|
| REGISTERED PROFESSIONAL LAND SURVEYOR |
| <i>B. A. Sutton</i> |
| OREGON JULY 13, 1979 B. A. SUTTON 1848 |

Office of..... County of.....

State of..... I hereby certify that the within instrument was filed in this office

for record on the..... day of....., 19.....

..... by
(COUNTY OFFICIAL)

(DEPUTY)

| |
|---|
| UNION COUNTY SURVEYOR |
| Date Received <u>7-2-84</u> |
| Date Filed ^{☆ GPO-798-276} <u>7-3-84</u> |
| By <u>G. LANGRISH DEPUTY</u> |
| File No. <u>909-84 R</u> |