

17-70A


20

CERTIFIED RECORD OF LAND CORNER DOCUMENTATION

History of original corner establishment:

Corner established by General Land Office Contract Survey.

The original notes state;
Set basalt stone 24x10x5", 18" in ground for corner to Sections 25, 26, 35 and 36 from which;
Pine 18" in diam bears S78°W 154 lks dist marked T3S R34E
Pine 15" in diam bears N8°W 240 lks dist marked T3S R34E S26BT;
Pine 6" in diam bears N52°E 49 lks dist marked T3S R34E S25BT;
Pine 15" in diam bears S62°E 49 lks dist marked T3S R34E S36BT;

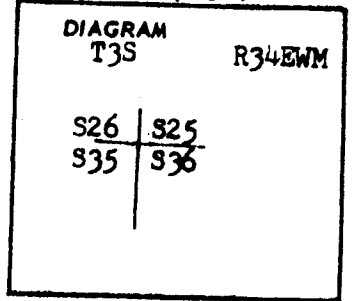


Description of corner evidence found:

In section 25, found 14" pine in good shape.

Description of monument and accessories established to perpetuate the original location of this corner

At the position of the corner I set a 30" galvanized pipe with an eight inch plate welded to bottom and a bronze cap on top. The hole was back filled with tene and tamped soil.

I stamped the disk

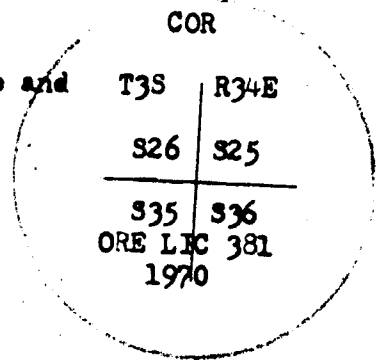

From the monument the original bearing trees were ;
Pine 14" in diam bears N52°E a dist of 49 lks.
I established the following new bearing trees;
Yellow pine 19" in diam bears N27°W a dist of 63 ft scribed T3S R34E S26BT;
Yellow pine 9" in diam bears S34°E at a distance of 42.5 ft. scribed T3S R34E S36BT;
Yellow pine 9" in diam bears S54°W at a distance of 29.1 ft. scribed T3S R34E S35BT;

The distance measured to center of respective trees on the level. Placed a bearing tree sign on both the old and new bearing trees and painted a stripe around the trees. I placed a steel fence post with USFS sign 54-4 attached near the corner. I also placed USFS boundary sign on the post indicating USFS land to west.

Office of Co-Surveyor County of Union
State of Oregon , I hereby certify that the within instrument was filed in this office
for record on the day of August 1970, at 4 o'clock P. m., (signed)
County Surveyor by
(COUNTY OFFICIAL)

UNION COUNTY SURVEYOR	
Date-Received _____	
Date Filed _____	
By _____	
File No. <u>396-84 R</u>	