


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

Index File No. Z-07

History of original corner establishment:

In 1882, under GLO Contract No. 451, Rufus S. Moore set a post, from which a 5" Pine bears N33°W, 14 lks. and a 7" Pine bears S17°W, 20 lks.

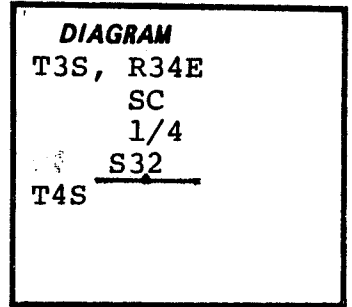

Description of corner evidence found:

Found original post with faint scribing lying near proportioned location. Couldn't find its original location.

Description of monument and accessories established to perpetuate the original location of this corner:

Set 2 1/2"x30" aluminum capped aluminum pipe rising 6", stamped: at proportioned location.

New BT's:

- A 7.5" W. Fir bearing N84°W, 21.7 ft., scribed "1/4 S32 BT".
- A 7" D. Fir bearing N7 3/4°E, 18.9 ft., scribed "1/4 S32 BT".

T3S R34E
 SC
 1/4
S32
 T4S
 1984
 RLS 1848

Painted blazes and attached signs as per Standard Specifications for Cadastral Surveys, USFS Region 6, March, 1982. Set metal post 4 ft. west of corner.

Compass Declination: 19 1/2°E
Witness: G. Arrand

From 2105-135, take 2105-110 north across large opening, 1/2 mi. A grove of trees on the right. Go west 600 ft. to the west end of the clearing. Corner is north 200 ft. down the hill.

I hereby certify the above described corner monument and/or accessories was established as described on May 16, 1984.

REGISTERED
 PROFESSIONAL
 LAND SURVEYOR

B. A. Sutton

OREGON
 JULY 13, 1979
 B. A. SUTTON
 1848

Office of..... County of.....
 State of..... I hereby certify that the within instrument was filed in this office
 for record on the..... day of....., 19.....

..... by
 (COUNTY OFFICIAL) (DEPUTY)

**UNION COUNTY
 SURVEYOR**

Date Received 7-2-84
 ☆ GPO-798.276
 Date Filed 7-3-84
 By G. LANGLITZ, DEPUTY
 File No. 913-84 R