


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment: Corner established in 1882 by Rufus S. Moore under General Land office contract no. 451. Surveyor General Record States;

Set basalt stone 18"x13"x12" for 1/4 corner marked 1/4 on W. face;

From which
A pine 16" in diameter bears N 53 E, 233 lks.



No record of remonumentation found in county records.

Description of corner evidence found:

Found;
Stone of called size marked 1/4

Found NE BT. stump, lower part of blaze visible at called distance and bearing.

Description of monument and accessories I established to perpetuate the original location of this corner I set a 2 1/2"x30" galvanized iron pipe with brass cap 20" in the ground and raised a mound of stone, at the location where the stone lay, from which;

New BTs.

A pine 12" in diameter bears N 31 W a distance of 179.8 feet, marked 1/4 S 21 BT.


A pine 15" in diameter bears N 49 E a distance of 189.5 feet marked 1/4 S 22 BT

I used a steel tape and a magnetic compass with 20 degrees East declination set into the compass.

I placed a nail with a brass washer marked O.P.L.S. 991 at the BT. blaze.

I set a steel fence post with a sign 5.0 feet south of the corner.

Note; I buried the stone on the north of the corner.

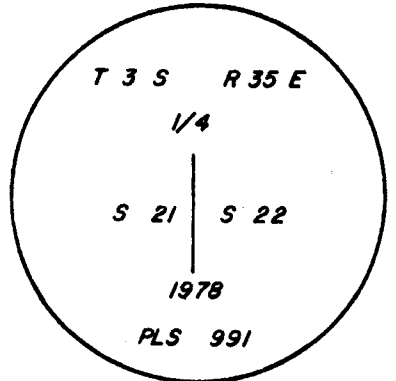

REGISTERED PROFESSIONAL LAND SURVEYOR

GREGORY T. BLACKMAN
JUL 23 1978
OREGON
GREGORY T. BLACKMAN
991

Office of Surveyor County of Union
State of Oregon, I hereby certify that the within instrument was filed in this office for record on the 18 day of Sept, 1978
J. P. [Signature] (COUNTY OFFICIAL) by G. T. Blackman (DEPUTY) SURVEYOR

UNION COUNTY SURVEYOR (DEPUTY)

Date Received _____

Date Filed _____

By _____

File No. 428-84 R