


UNION COUNTY SURVEYOR  
CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL ESTABLISHMENT

CORNER WAS ORIGINALLY ESTABLISHED BY RUFUS MOORE UNDER GLO CONTRACT NO. 451, DATED JUNE 12, 1882. RECORD STATES: SET A POST 3 FT. LONG 3 IN. SQUARE 24 IN. IN GROUND. FROM WHICH A FIR 30 IN. DIAMETER BEARS N60°E 62 LINKS DIST. MARKED 1/4S BT, AND A FIR 24 IN DIAMETER BEARS S50°W 45 LINKS MARKED 1/4S BT.

T3S R35E R-15

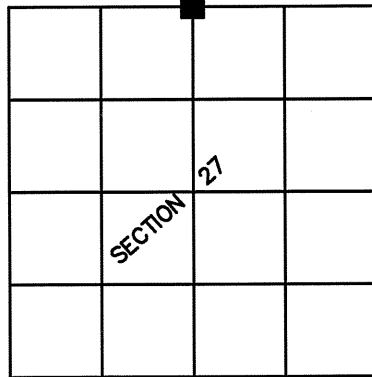

DESCRIPTION OF CORNER EVIDENCE FOUND

FOUND DECOMPOSED STUMP IN NE QUADRANT WITH PITCH COVERED BLAZE AND SCRIBE. ALSO FOUND STUMP HOLE AND DECOMPOSED WOOD IN SW QUADRANT AT RECORD POSITION IN RELATIONSHIP TO STUMP IN NE QUADRANT. NO EVIDENCE OF POST AT CORNER ITSELF. CALCULATED CORNER POSITION IS 83' WEST OF BOTTOM OF DRAW (RECORD STATES 1.25 CHAINS= 82.5')

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER

AT THE RECORD RELATIONSHIP FROM ORIGINAL BEARING TREE AND FROM STUMP HOLE WE SET A 5/8"X30" REBAR WITH 2" ALUMINUM CAP STAMPED: "TOMKINS SURVEYING 22/27 LS2360-2014" FROM WHICH WE SET THE FOLLOWING ACCESSORIES:  
A 5/8"X30" REBAR WITH YELLOW CAP "TLS-HDJ" N22°W 24.7'.  
AN 11" PINE SCRIBED "S22 1/4 BT" BEARS N26°E 84.2'.  
A 16" TAMARACK SCRIBED "S22 1/4 BT" BEARS N45°E 45.5'.  
A 5/8"X30" REBAR WITH YELLOW CAP "TLS-HDJ" S54°W 29.7'.

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

OREGON  
JULY 26, 1988  
PAUL W.P. TOMKINS  
2360

renews 6/30/16  
9/2/14

BY OPUS SOLUTION, THE OREGON NORTH STATE PLANE COORDINATES FOR THIS CORNER ARE:  
N: 595791.07  
E: 8737911.07  
BEARINGS TO ACCESSORIES ARE RELATED TO GEODETIC NORTH. TIES WERE MADE TO ACCESSORIES USING REAL TIME KINEMATIC METHODS.

UNION COUNTY SURVEYOR

---

Date Received 9/9/14

Date Filed 9/9/14

By [Signature]

File No. 052-2014R