


UNION COUNTY SURVEYOR
CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL ESTABLISHMENT

CORNER WAS ORIGINALLY ESTABLISHED BY RUFUS MOORE UNDER GLO CONTRACT NO. 451, DATED JUNE 12, 1882. RECORD STATES:
SET A POST 4 FT LONG 4 IN. SQUARE WITH CHARRED STAKE 12" IN GROUND. DUG PITS 18X18X12 IN. DEEP AND RAISED A MOUND OF EARTH 2 FT. HIGH.

T3S R35E V-17

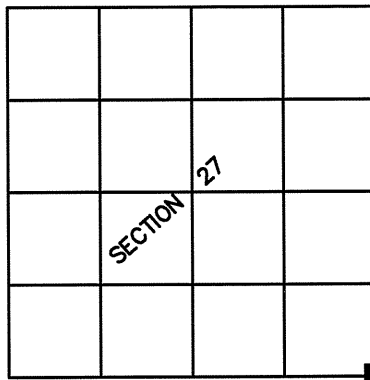

DESCRIPTION OF CORNER EVIDENCE FOUND

NONE FOUND. CORNER ESTABLISHED BY DOUBLE PROPORTIONATE MEASUREMENT PURSUANT TO SURVEY 059-2013.

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER

AT THE CALCULATED POSITION WE SET A 1"X30" GALVANIZED PIPE WITH 2 1/2" BRASS CAP STAMPED "TLS-HDJ 27/26/34/35 LS2360- 2014." BRASS CAP PROTRUDES 6" FROM GROUND. ACCESSORIES AS FOLLOW:
5/8"X30" REBAR WITH YELLOW CAP "TLS-HDJ" N49°E 50.0'.
5/8"X30" REBAR WITH YELLOW CAP "TLS-HDJ" N35°W 50.0'.
5/8"X30" REBAR WITH YELLOW CAP "TLS-HDJ" S34°E 50.0'.
5/8" REBAR WITH YELLOW CAP "APA" S34°38'W 195.0'.

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Paul W.P. Tomkins
OREGON
JULY 26, 1988
PAUL W.P. TOMKINS
2360

*renews 6/30/16
9/2/14*

BY OPUS SOLUTION, THE OREGON NORTH STATE PLANE COORDINATES FOR THIS CORNER ARE:
N: 590469.81 E: 8740679.51

BEARINGS TO ACCESSORIES ARE RELATED TO GEODETIC NORTH. TIES WERE MADE TO ACCESSORIES USING REAL TIME KINEMATIC METHODS.

UNION COUNTY SURVEYOR

Date Received 9/9/14

Date Filed 9/9/14

By *WJG*

File No. 053-2014R