


**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

**HISTORY OF ORIGINAL CORNER ESTABLISHMENT:**

W-20

None. Corner established by survey.

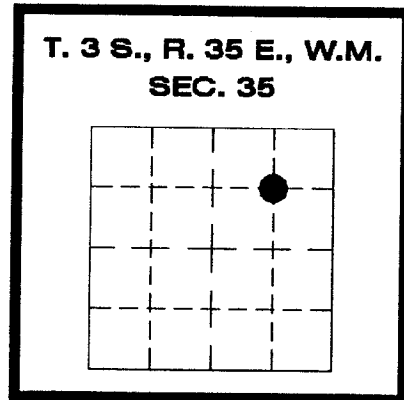

**DIAGRAM**

**DESCRIPTION OF CORNER EVIDENCE FOUND:**

None.

**DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:**

Set a 5/8 inch iron rod with 2 inch aluminum cap marked:

ANDERSON-PERRY  
T3S R35E  
NE 1/16 S35  
1998  
OR 2537 WA 35140

two inches above ground with a 2 foot diameter mound of stone.

**FROM WHICH:**

A 7 inch ponderosa pine bears N 55° E, 94.3 feet scribed: NE1/16 S35 BT

An 8 inch ponderosa pine bears S 52° E, 93.4 feet scribed: NE1/16 S35 BT

Bearings are based upon True North

3-5-99  
3-16-99  
R. ROBINSON, DEPUTY  
010-1999R

**LOCATION:**

The monument falls at the east edge of a large meadow, ±100 feet southeast of Meadow Creek, ±25 feet northwest of the toe of hill, 6.5 feet southeast of fence and 35 feet northeast of gate.

I hereby certify that the above corner point was

perpetuated as hereon described on NOVEMBER, 1998

Witnesses: Rodney J. Lewis, L.S. 2872

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*H. M. [Signature]*  
OREGON  
JAN. 21, 1992  
HARMON E. McLENDON  
2537

Renews 12/31/00