


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

W-21

None. Corner established by survey.

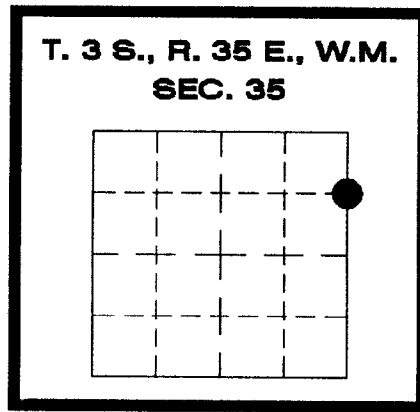

DIAGRAM

DESCRIPTION OF CORNER EVIDENCE FOUND:

None.

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

Set a 5/8 inch iron rod with 2 inch aluminum cap marked:

ANDERSON-PERRY
T3S R35E
N 1/16
S35 | S36
1998
OR 2537 WA 35140

four inches above ground with a 3 foot diameter mound of stone.

FROM WHICH:

A 5/8 inch iron rod with a yellow plastic cap marked: "APA" bears S 88° E, 23.8 feet

A 5/8 inch iron rod with a yellow plastic cap marked: "APA" bears S 1° E, 29.3 feet

Bearings are based upon True North

3-5-99
3-16-99
R. ROBINSON, DEPUTY
009-1999R

LOCATION:

The monument falls in an open area ±200 feet southwest of hilltop, ±650 feet east of 4WD road and ±375 feet northeast of a 48 inch ponderosa pine.

I hereby certify that the above corner point was

perpetuated as hereon described on November 1998

Witnesses: Rodney J. Lewis, L.S. 2872

REGISTERED
PROFESSIONAL
LAND SURVEYOR

OREGON
JAN. 21, 1992
HARMON E. McLENDON
2537

Renews 12/31/00