


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

C-19

History of original corner establishment:
None. Corner established as part of this survey.

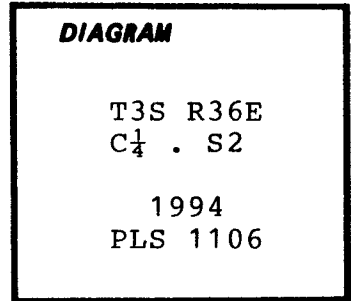

Description of corner evidence found:
None.

Description of monument and accessories established to perpetuate the original location of this corner:

At position established by survey:
Set a 2 $\frac{1}{2}$ " x 30" aluminum pipe with a 2 $\frac{1}{2}$ " aluminum cap, buried 21" in ground, surrounded with a mound of stone.
Attached sign 54-9 to a 6' steel fence post, set 3' North of monument.
New bearing trees established:
A 24" ponderosa pine bears N 39° E - 104.7 ft., scribed "C $\frac{1}{4}$ S2BT".
A 13" ponderosa pine bears S 52 1/2° E - 55.7 ft., scribed "C $\frac{1}{4}$ S2BT".
A 15" ponderosa pine bears S 22° W - 288.0 ft., scribed "C $\frac{1}{4}$ S2BT".
A 16" ponderosa pine bears N 19° W - 322.1 ft., scribed "C $\frac{1}{4}$ S2BT".
New bearing trees have a brass washer stamped "PLS 1106" nailed to face of blaze. Attached sign 54-3 & 54-9, painted face of blaze & a 6" red band around each tree.

A Warren Knight staff compass and steel tape was used to tie bearing trees. I hereby certify that the above corner monument was properly monumented to U.S.F.S. standards by me on November 9, 1994.

Compass declination 18° East.

Witnessed by: Greg E. Flowers, LSIT
Todd Rosenbalm

REGISTERED
PROFESSIONAL
LAND SURVEYOR

William R. Wells

OREGON
JULY 22, 1977
WILLIAM R. WELLS
1106

renews 6/30/98

Office of..... County of.....
State of....., I hereby certify that the within instrument was filed in this office
for record on the..... day of....., 19.....
..... by
(COUNTY OFFICIAL)

**UNION COUNTY
SURVEYOR**
(DEPUTY)

Date Received 7-10-96
Date Filed 7-10-96
By R. ROBINSON, DEPUTY
File No. 067-1996R