


UNION COUNTY
CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by John H. Hurlburt under GLO Contract Number 201, dated August 5, 1873. Surveyor General record states:
Set Post 4 inches square in ground in. for $\frac{1}{4}$ Sec. Cor. from which;

A 24 inch diameter Pine bears North, 127 Lks.
A 36 inch diameter Pine bears S16°E, 220 Lks.



No record of subsequent monumentation found in Union County survey records.

Description of corner evidence found:

Found no evidence of the original corner monument.

Area had been logged and burned.

See Map of Survey Number 028-1992.

Description of monument and accessories I established to perpetuate the original location of this corner:

At the proportionate position, determined by survey I set a $2\frac{1}{2}$ "x30" aluminum pipe with aluminum cap marked as shown, 24 inches in the ground, from which;


New Bearing Trees;

- A 16 inch diameter Ponderosa pine bears N84°E, 56.13 feet marked 1/4 S2 BT
- A 14 inch diameter Ponderosa pine bears S53°W, 112.57 feet marked 1/4 S11 BT
- A 15 inch diameter Ponderosa pine bears West, 115.07 feet marked XX BT
- A 19 inch diameter Ponderosa Pine bears N20°W, 115.44 feet marked X BT

Raised a mound of stone with a three foot base to the top of the cap.
Set a steel fence post approximately 5 feet East, with a 54-9 sign attached.

I hereby certify that the above corner point was perpetuated as hereon described on July 13, 1992.

Witness: Jim Bennett
Pete Crabtree

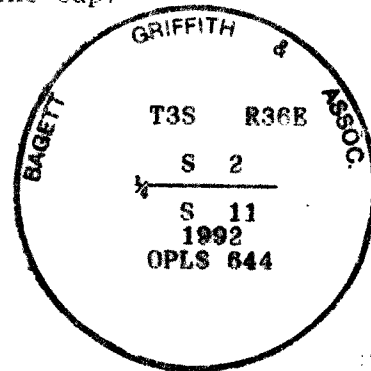

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Duane I. Griffith
OREGON
JULY 10 1984
DUANE I. GRIFFITH
644

I used a steel tape and magnetic compass in the establishment of new accessories. I used 20° East magnetic declination and the distances are to a 50d spike driven in the right side of the root crown. I attached a brass washer marked OPLS 644 to the BT blaze.

UNION COUNTY
SURVEYOR

Date Received 11/23/92

Date Filed 11/28/92

Guy Black

File No. 107-1992R