


UNION COUNTY
CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by John H. Hurlburt under GLO Contract Number 201, dated August 5, 1873. Surveyor General record states:

Set a stone 15x12x10 in a mound of stone for $\frac{1}{4}$ Sec. Cor. marked $\frac{1}{4}$

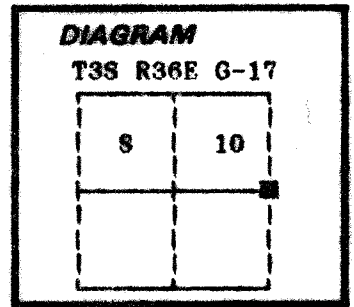

No record of subsequent monumentation found in Union County survey records.

Description of corner evidence found:

Found no evidence of the original corner monument.

Area is on a steep west face 100' East of a creek.

See map of Survey Number 028-1992.

Description of monument and accessories I established to perpetuate the original location of this corner:

At the proportionate position, determined by survey, I set a $2\frac{1}{2}$ "x30" aluminum pipe with aluminum cap marked as shown, 24 inches in the ground, from which:


New Bearing Trees;

- A 18 inch diameter Ponderosa Pine bears N34°E, 50.33 feet marked X BT
- A 17 inch diameter Ponderosa Pine bears S24°E, 36.18 feet marked 1/4 S11 BT
- A 12 inch diameter Ponderosa Pine bears S46°W, 33.20 feet marked X BT
- A 14 inch diameter Ponderosa Pine bears N51°W, 50.75 feet marked 1/4 S10 BT

Raised a 4 foot mound of stone to the top of the cap.
Set a steel fence post approximately 5 feet North with a 54-9 sign attached.

I hereby certify that the above corner point was perpetuated as hereon described on July 13, 1992.

Witness: Peter Crahtree
Jim Bennett

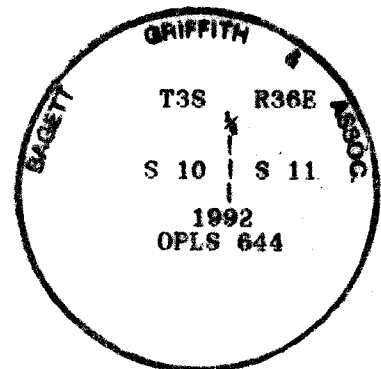

REGISTERED
PROFESSIONAL
LAND SURVEYOR

OREGON
JULY 10, 1984
DUANE I. GRIFFITH
644

I used a steel tape and magnetic compass in the establishment of new accessories. I used 20° East magnetic declination and the distances are to a 50d spike driven in the right side of the root crown. I attached a brass washer marked OPLS 644 to the BT blaze.

UNION COUNTY
SURVEYOR

Date Received 11/23/92

Date Filed 11/28/92

By Greg Black

File No. 110-1992K