


UNION COUNTY
CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by John H. Hurlburt under GLO Contract Number 201, dated August 5, 1873. Surveyor General record states:
Set a post 4 inches square for ¼ Sec. Cor.

A 18 inch diameter Pine bears N76°W, 57 Lks.
A 18 inch diameter Pine bears S51°E, 61 Lks.

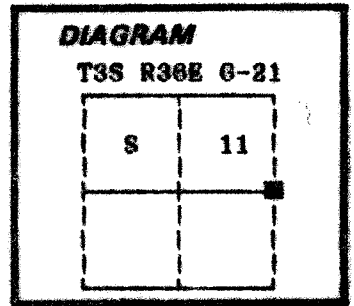

No record of subsequent monumentation found in Union County survey records.

Description of corner evidence found:

Found no evidence of the original corner monument.

See map of Survey Number 028-1992.

Description of monument and accessories I established to perpetuate the original location of this corner:


At the proportionate position, determined by survey, I set a 2½"x30" aluminum pipe with aluminum cap marked as shown, 27 inches in the ground, from which:

New Bearing Trees;
A 20 inch diameter Ponderosa Pine bears N44°E, 41.54 feet marked ¼ S12 BT
A 14 inch diameter Ponderosa Pine bears S64°E, 52.45 feet marked X BT
A 14 inch diameter Ponderosa Pine bears N74°W, 5.66 feet marked ¼ S11 BT
A 16 inch diameter Ponderosa Pine bears N85°W, 20.10 feet marked XX BT

Raised a 4 foot base mound of stone to the top of the cap.
Set a steel fence post approximately 5 feet South with a 54-9 sign attached.

I hereby certify that the above corner point was perpetuated as hereon described on July 15, 1992.

Witness: Peter Crabtree
Jim Bennett

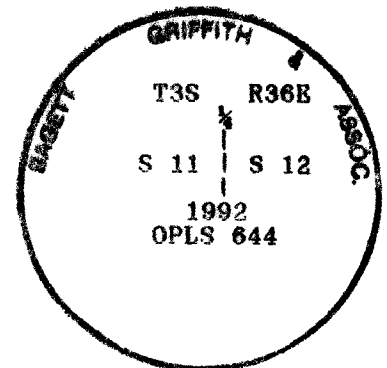

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Duane I. Griffith
OREGON
JULY 10 1964
DUANE I GRIFFITH
644

I used a steel tape and magnetic compass in the establishment of new accessories. I used 20° East magnetic declination and the distances are to a 50d spike driven in the right side of the root crown. I attached a brass washer marked OPLS 644 to the BT blaze.

UNION COUNTY
SURVEYOR

Date Received 11/23/92
Date Filed 11/28/92
By *[Signature]*
File No. 113-1992R